

revimca PRODUCTOS-SISTEMAS

CATALOGUE CATERING

DETERGENTS, KITCHENDEGREASING

CLEANING AND DISINFECTION OF BATHROOMS

GENERAL CLEANING

CATERING MAINTAINING

FLOOR TREATMENT AND CLEANING

LAUNDRY PRODUCTS

AIR-FRESHENERS

INSECTICIDES

CLEANING AND MAINTINING OF POOLS

ETC.

C/ Canadá 12, Polígono Industrial El Viso, 2ª Fase. 29006 - Málaga

Tel.: 952 340 000 - Fax.: 952 349 100

www.revimca.com

email: revimca@revimca.com

KITCHENS

VAJILIN-INDUSTRIAL. Special Catering vvasning-up Liquid	
VAJILIN-CONCENTRADO. Concentrated Washing-up Liquid	
VAJILIN-MAX. Maximum Concentration Washing-up Liquid (Hand-washing)	A16
SANIFOAM. Alkaline Fat-remover Foam for Food Use	A17
LAVATORIES AND DISINFECTING	
SANILUX. Ammonia-based Lavatory Cleaner	
REVI-BAÑO. Toilet/bath Cleaning Detergent	
BACTERI-FUN. Disinfectant Cleaner	
BACTERI-GEL. Industrial-strength Anti-bacterialDetergent	
SAUNAS-BAC. Anti-bacterial Cleaner for Sports Facilities	
XITOL. De-scaler-Anti-rust-Degreasing Agent	
QUISOL. Multi-action Chemical Cleaner	
HIGINEL. Desinfectant bactericidal fungicide of contact of use in the food industry (high foam power)	
CLORAGEL. Disinfectant bactericidal-fungicide of contact for use in the food	
ELVA. Silky Skin-conditioning Gel	
REVIGER. Instant Anti-bacteria Cleaner	B11
MISCELLANEOUS CLEANING	
VILIM. Window cleaner	
MILUSOS. Multi-purpose anti-dust and grime Cleaner	
SEDELLA. Multi-purpose Cleaner	
MULTI-REVIMCA. Multi-purpose Detergent	
ALUTEC. Aluminium, Copper and Brass Cleaner-Polish	
HIDROSUL. Sheen Degreasing Agent	
TAPIMOX. Carpet, Upholstery and Rug Cleaner	
GLEYSE. Wood-nourishing Sheen	C7
CATERING MAINTENANCE	
GRASOLOR. Odour and Grease Remover	D1
TUBEFON. Drain Clearer	
ABRITON. Instant Blockage Remover	
SOLI-GAS. Diesel Additive	
SOLI-FUEL. Fuel-oil Additive	
SINCAL. Boiler and Cooling Tower Anti-Scale Protection	
VENTILEC. Electrical Circuit Anti-moisture Protection	
CLOROPOT. Chlorine for Drinking Water Treatment	
RETROC-MAX. Concentrated Hydrofugant	
REVICEM. Waterproofing Cement for Damp Walls and Walls with Hydraulic Heads	
PAVON. Iron Oxide Treatment (Oxide Transformer)	
DISOLMAN. Industrial Degreasing Handwash	
RUSTISAN. Wet-look Treatment for Rustic and Earthenware Floors	D13

	D16
REVI-MOSS. Anti-moss treatment	
BIO-REV. Biological Treatment for septic tanks	
REVIPACK. Effervescent Pastilles for Biological treatment	
REVITOP. Non-slip Treatment for Enamelled Surfaces	
REVIGRES. Anti-slip treatment for stoneware and painted surfaces	
ALIREV. Non-toxic Colourless Grease for the Food Industry	
ODOREV. Eco-solvent odour remover	
BROCHE-LEG. Anti-Legionnaire's Disease Disinfectant	
FLOOR TREATMENT AND CLEANING	DZJ
OH FO. Oleans and Ale Freehamen	-4
SILFO. Cleaner and Air Freshener	
SUDEL. Cleaner for Delicate Floors	
TROWEN. Universal Neutral Detergent DETERSUL. Floor-cleaner Detergent	
ANETO-I. Marble Sheen and Protector	
ANETO-II. Cleaner - Marble Sheen (daily use)	
REBRILL. Floor Sheen, for mops and dusters	F6
STARK. Floor wax	
CLORAGEL. Disinfectant bactericidal-fungicide of contact for use in the food	
SANILUX. Ammonia-based Lavatory Cleaner	
INTENSO. Strongly Perfumed Floor Cleaner	
LAUNDRY	
MEIBEL. Liquid Fabric Detergent	F1
SUATEX. Fabric Softener	
KINGRAS. Energy and Safety Degreasing Agent	
PURIFYING AIR FRESHENERS	
AM-PER. Lasting-scent Air-freshener	G1
AM-PER. Lasting-scent Air-freshener	
AMBIBAC. Anti-bacterial Air-freshener	G2
	G2 G3
AMBIBAC. Anti-bacterial Air-freshener	G2 G3
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES	G2 G3 G4
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects	G2 G3 G4
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects	G2 G3 G4 H1 H2
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects	G2 G3 G4 H1 H2 H3
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects POTENTOR-FORTE. Insecticide for Crawling Insects	G2 G3 G4 H1 H2 H3 H4
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects POTENTOR-FORTE. Insecticide for Crawling Insects POTENTOR-LACA. Insecticide Spray for Crawling Insects.	G2 G3 G4 H1 H2 H3 H4
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects POTENTOR-FORTE. Insecticide for Crawling Insects POTENTOR-LACA. Insecticide Spray for Crawling Insects POTENTOR-FLIT.Insecticide for Flying Insects SWIMMING POOLS	G2 G3 G4 H1 H2 H3 H4 H5
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects POTENTOR-FORTE. Insecticide for Crawling Insects POTENTOR-LACA. Insecticide Spray for Crawling Insects POTENTOR-FLIT.Insecticide for Flying Insects SWIMMING POOLS HIDROPOOL. Anti-algae Treatment.	G2 G3 G4 H1 H2 H3 H4 H5
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects POTENTOR-FORTE. Insecticide for Crawling Insects POTENTOR-LACA. Insecticide Spray for Crawling Insects. POTENTOR-FLIT.Insecticide for Flying Insects SWIMMING POOLS HIDROPOOL. Anti-algae Treatment ALGISUN. Foam-free Anti-algae Treatment	G2 G3 G4 H1 H2 H3 H4 H5
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects POTENTOR-FORTE. Insecticide for Crawling Insects POTENTOR-LACA. Insecticide Spray for Crawling Insects POTENTOR-FLIT.Insecticide for Flying Insects SWIMMING POOLS HIDROPOOL. Anti-algae Treatment ALGISUN. Foam-free Anti-algae Treatment RECUAX PH+. PH + Regulator.	G2 G3 G4 H1 H2 H3 H4 H5
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects POTENTOR-FORTE. Insecticide for Crawling Insects POTENTOR-LACA. Insecticide Spray for Crawling Insects POTENTOR-FLIT.Insecticide for Flying Insects SWIMMING POOLS HIDROPOOL. Anti-algae Treatment ALGISUN. Foam-free Anti-algae Treatment RECUAX PH+. PH + Regulator RECUAX PH PH - Regulator	G2 G3 G4 H1 H2 H3 H4 H5
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects POTENTOR-FORTE. Insecticide for Crawling Insects POTENTOR-LACA. Insecticide Spray for Crawling Insects POTENTOR-FLIT.Insecticide for Flying Insects SWIMMING POOLS HIDROPOOL. Anti-algae Treatment ALGISUN. Foam-free Anti-algae Treatment RECUAX PH+. PH + Regulator.	G2 G3 G4 H1 H2 H3 H4 H5
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects POTENTOR-FORTE. Insecticide for Crawling Insects POTENTOR-LACA. Insecticide Spray for Crawling Insects POTENTOR-FLIT.Insecticide for Flying Insects SWIMMING POOLS HIDROPOOL. Anti-algae Treatment ALGISUN. Foam-free Anti-algae Treatment RECUAX PH+. PH + Regulator RECUAX PH PH - Regulator BROCHE FLOC. Flocculant Agent	G2 G3 G4 H1 H2 H3 H4 H5
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects POTENTOR-FORTE. Insecticide for Crawling Insects POTENTOR-LACA. Insecticide Spray for Crawling Insects POTENTOR-FLIT.Insecticide for Flying Insects SWIMMING POOLS HIDROPOOL. Anti-algae Treatment ALGISUN. Foam-free Anti-algae Treatment RECUAX PH+. PH + Regulator RECUAX PH PH - Regulator BROCHE FLOC. Flocculant Agent DESCAL. De-scaler and Industrial-strength Cleaner HIDROPEN. Swimming Pool Paint REVIPEN. Solvent-based swimming pool paint	G2 G3 G4 H1 H2 H3 H4 H5 I1 I2 I3 I4 I5 D14 I6
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects POTENTOR-FORTE. Insecticide for Crawling Insects POTENTOR-LACA. Insecticide Spray for Crawling Insects POTENTOR-FLIT.Insecticide for Flying Insects SWIMMING POOLS HIDROPOOL. Anti-algae Treatment ALGISUN. Foam-free Anti-algae Treatment RECUAX PH+. PH + Regulator RECUAX PH PH - Regulator BROCHE FLOC. Flocculant Agent DESCAL. De-scaler and Industrial-strength Cleaner HIDROPEN. Swimming Pool Paint REVIPEN. Solvent-based swimming pool paint BROCHE PISCICLOR. Chlorine for Treatment of Swimming Pools	G2 G3 G4 H1 H2 H3 H4 H5 I1 I2 I3 I4 I5 D14 I6 I7 I8
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects POTENTOR-FORTE. Insecticide for Crawling Insects POTENTOR-LACA. Insecticide Spray for Crawling Insects POTENTOR-FLIT.Insecticide for Flying Insects SWIMMING POOLS HIDROPOOL. Anti-algae Treatment ALGISUN. Foam-free Anti-algae Treatment RECUAX PH+. PH + Regulator RECUAX PH PH - Regulator BROCHE FLOC. Flocculant Agent DESCAL. De-scaler and Industrial-strength Cleaner HIDROPEN. Swimming Pool Paint REVIPEN. Solvent-based swimming pool paint BROCHE PISCICLOR. Chlorine for Treatment of Swimming Pools BROCHE RAPID-FLOC. Fast-acting Flocculant	G2 G3 G4 H1 H2 H3 H4 H5 I1 I2 I3 I4 I5 D14 I6 I7 I8 I9
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects POTENTOR-FORTE. Insecticide for Crawling Insects POTENTOR-LACA. Insecticide Spray for Crawling Insects POTENTOR-LIT.Insecticide for Flying Insects SWIMMING POOLS HIDROPOOL. Anti-algae Treatment ALGISUN. Foam-free Anti-algae Treatment RECUAX PH+. PH + Regulator RECUAX PH+. PH - Regulator BROCHE FLOC. Flocculant Agent DESCAL. De-scaler and Industrial-strength Cleaner HIDROPEN. Swimming Pool Paint REVIPEN. Solvent-based swimming pool paint BROCHE PISCICLOR. Chlorine for Treatment of Swimming Pools BROCHE RAPID-FLOC. Fast-acting Flocculant BROCHE ALGI-FLOC. Non-foaming Flocculant Algaecide	G2 G3 G4 H1 H2 H3 H4 H5 I1 I2 I3 I4 I5 D14 I6 I7 I8 I9 I10
AMBIBAC. Anti-bacterial Air-freshener AROMATIC. Purifying Air-freshener VERA. Transparent Permanent Air-freshener INSECTICIDES POTENTOR-ACARO. Mite-killer for Crawling Insects POTENTOR-EMULSIONABLE. Emulsifying insecticide for flying and crawling insects POTENTOR-FORTE. Insecticide for Crawling Insects POTENTOR-LACA. Insecticide Spray for Crawling Insects POTENTOR-FLIT.Insecticide for Flying Insects SWIMMING POOLS HIDROPOOL. Anti-algae Treatment ALGISUN. Foam-free Anti-algae Treatment RECUAX PH+. PH + Regulator RECUAX PH PH - Regulator BROCHE FLOC. Flocculant Agent DESCAL. De-scaler and Industrial-strength Cleaner HIDROPEN. Swimming Pool Paint REVIPEN. Solvent-based swimming pool paint BROCHE PISCICLOR. Chlorine for Treatment of Swimming Pools BROCHE RAPID-FLOC. Fast-acting Flocculant	G2 G3 G4 H1 H2 H3 H4 H5 I1 I2 I3 I4 I5 D14 I6 I7 I8 I9 I10

KINGRAS

ENERGY AND SAFELY DEGREASER





Universal and Energy cleaner for all types of greases. Specially designed to the cleaning and removing of the grease from floors, griddles, ovens, industrial kitchens, smoke extractor, filters, refineries, weaves, tools and in general in those activities where it is necessary to provide universal and energetic degreaser.

APLICATIONS

- Cleaning and degreasing of: floors, kitchen's griddles, industrial kitchens, extractors, and in general in those places where the presence of an energy and universal degreaser is required.
- Generally anywhere with remote and difficult spots to eliminate.

PROPERTIES

- Great penetrating power.
- Dissolves the oils, greases and the most embedded dirt in general, extracting and turning them into soluble products and easily to drag.
- It is not flammable, and it does not help to the combustion. It does not contain dangerous solvents.
- It is biodegradable, so that it does not contribute to the contamination of the waters or to the environment.
- Controlled sparkling power, so that it results especially easy its clarified.

INSTRUCTIONS OF USE

Depending on the quantity and type of dirt we want to eliminate, the product will be used pure or diluted in 10 parts of water.

In kitchen's griddles:

If there is no excessive dirt, it can be used a dilution of 1 part of product in 4 of water, proceed to its cleaning, with a mop or a scourer.

In case of excessive dirt or coal dust, cover the griddle with an impregnated mop (I part of product per 2 in water), leave to act a few minutes and clarify.

In smoke extractors, tiles and stainless steel furniture:

Use 1 part of product per 6 of water, spray all the surface, leave to act a few seconds and rinse with abundant water.

In ovens:

If there is no excessive dirt, follow the previous steps; in case of abundant dirt, use the pure product, leaving to act 2 minutes approximately and after that clarify.

In tools

Clean by immersion, covering the tools with the dilution of 1 part of product per6 of water, putting especial attention in the pieces of aluminum, as an excess of time, it can get them dark.

In floors:

In the mopped of greasy floors, use 60 cc approximately per bucket of water (8liters).

 Cleaning and maintenance of air-conditioned machines, with spray gun, with a dilution of 1:10, leaving to act only a few seconds and rinse with abundant water immediately.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.















HIDROSUL

SHEEN DEGREASING AGENT





Degreasing cleaner specially for the elimination of grease, wax, rests of blood in quartering, dust, dirt,, rests of insecticide and weed-killer in fruits, and also in coloring spots, ink, coal, etc.

APLICATIONS

In food industry:

Degreasing and washing of all types of facilities, tools and machinery.

• In the vegetable and fruit industry:

Degreasing and washing of all types of tools and facilities. For the elimination of residues of insecticide emulsions and weed-killer in the skill or tegument of fruits.

In the general industry:

Elimination of greases, coal, inks, wax, coloring and dirt with the maximum guarantee of security.

PROPERTIES

- Possesses the suitable properties to use in the deep cleaning that the tools and facilities required on the food industry.
- Presents a high degreasing power, and a low production of foam, what makes appropriate in the washes where the clarified is not easy.
- Once the cleaning action is done, it is easy to eliminate meanwhile a clarified with water without leaving any residue.
- It does not attack to metallic surfaces, do not damaging its finish.

INSTRUCTIONS OF USE

It can be applied by immersion, spraying or mopping.

- Cleaning of the skin of fruits: with a wash with stirring and later clarify with water until the elimination of all the dirt and rests of product. We recommend to use dilutions in water between the IO and I5%.
- Cleaning of industrial tools: it can be used by immersion or mopping, using dilutions of 1 part of product per 1 of water until 1 of product per 15 of water.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













KINGRAS-25

DESENGRASANTE COCINAS





Energetic degreasing cleaner, for all types of greases. Specially indicated in the cleaning and degreasing of: floors, kitchen griddles, ovens, industrial kitchens, smoke extractor, filters, refineries, etc.

APLICATIONS

- Cleaning of kitchens in: Hotels, Restaurants, Cafeterias, Schools, airconditioned machines, etc.
- In general in any place where hidden spots and difficult to eliminate exist.

PROPERTIES

- High power of penetration.
- Dissolves the oils, greases and dirt very embedded in general, extracting and transforming them in soluble products and easy to eliminate with water.
- It is not inflammable, and it does not help to the combustion. It does not contain dangerous solvents.
- It is biodegradable, for this it does not contribute to the contamination of the waters, or to the environment.
- Controlled foam power, for this, it results especially comfortable the clarified.

INSTRUCTIONS OF USE

- As degreasing: depending on the quantity and type of dirt that we want to eliminate, the product will be used from pure to diluted at the 50% in water.
- By spraying: spray the surface, leave to acts a few seconds, move it away with a damp mop.
- By rubbing: wet a mop or sponge in the product and rub doing circles on the surface, collect the dirt with a clean and damp mop.
- By immersion: introduce the tools in a recipient covering them with the product diluted in water, leave to act a few minutes, and after that eliminate with abundant water.
- Scrubbed of floors: 150-180 cc per bucket of water (8 liters)

Do not treat aluminum or galvanized.

 Cleaning and maintenance of air-conditioned machines with spray gun, with a dilution of 1:10, leaving to act during a few seconds and clarify immediately with abundant water.

Presentation

10L in box of 2 uds.



VITRONIL

DISWASHER DETERGENT





Detergent for the wash of dinner service and glassware in automatic machines, with controlled foam.

APLICATIONS

Industrial dishwashers in Catering: cafeterias, restaurants, hotels, hospitals, etc.

PROPERTIES

- It is a complex mixture and perfectly equilibrated of surfactants specially added with powerful agents solubiliser and scatter of greases that guarantee completely the moisturizing of the pieces.
- Possesses an elevated sequestrant power of calcium and magnesium ions that facilitate the wrung of the glassware without leaving lime spots.
- It does not produce foam, avoiding the problems that excess of foam can produce inside of the machine.
- Concentrated product, so that its performance is optimal, even using small dosages.

INSTRUCTIONS OF USE

- It can be dosed manually using automatic dispensers.
- In any of the cases, we recommend to follow the instructions of the machine manufacturer.

Illustrative dosage

- 50-100 cc in machine of medium type
- 0,1-0,3% in general machines.

For a higher efficacy of our product, we recommend to look after the embedded grade of the machine used, so that we recommend the periodically use of our **DESCALING DESCAL A.E.**

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.















VITRONIL-25 DISWAHER DETERGENT





Detergent for the wash of dinner service and glassware in automatic machines, with controlled foam.

APLICATIONS

We recommend its use in both industrial and domestic dishwasher, and in: restaurants, hotels, hospitals, cafeterias, etc.

PROPERTIES

- Possesses an elevated sequestrant power of calcium and magnesium ions that facilitate the wrung of the glassware without leaving lime spots.
- It does not produce foam, avoiding the problems that excess of foam can produce inside of the machine.
- Emulsifies and scatters greases of the kitchen's tools avoiding possible redepositions.
- Concentrated product, so that its performance is optimal, even using small dosages.

INSTRUCTIONS OF USE

- It can be dosed manually using automatic dispensers.
- In any of the cases, we recommend to follow the instructions of the machine manufacturer.
- For a higher efficacy of our product, we recommend to look after the embedded grade of the machine used, so that we recommend the periodically use of our **DESCALING TAR-50 A.E.**

Presentation

• 10L in box of 2 uds.





VITRODUR DISWASHER DETERGENT (HARD WATER)



VITRODUR

Detergent for the wash of dinner service and glassware in automatic machines for all those areas where the hardness of the water requires a special treatment.

APLICATIONS

Industrial dishwashers in: cafeterias, hotels, restaurants, hospitals, etc.

PROPERTIES

- Avoid the incrustation of the calcium and magnesium ions, even in areas of water with elevated hardness.
- Possesses controlled foam.
- Provides a quick wrung and shining finishes.
- Possesses a high descaling power even in kitchen tools with difficult access.
- Concentrated product, so that its performance is optimal, even using small dosages.

INSTRUCTIONS OF USE

• It can be dosed by hand/manually or using automatic dispensers.

In any of the cases, we recommend to follow the instructions of the machine manufacturer.

Dosis orientativa:

- 50-100 cc in machines of medium type.
- 0,1-0,3 % in general machines.

For a higher efficacy of our product, we recommend to look after the embedded grade of the machine used, so that we recommend the periodically use of our DESCALING DESCAL A.E.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.















VITRONIL E.D

DISWASHER DETERGENT (EXTRA- HARD WATER)



VITRONIL-E.D.

Detergent for the wash of dinner service and glassware in automatic machines for all those areas where the water contains extra hardness.

APLICATIONS

Industrial dishwasher in: restaurants, hospitals, big collectivities, hotels, etc, in areas where the water has extra hardness.

PROPERTIES

- The high concentration in dispersant and sequestrant and an equilibrated mixture of surfactants and moisturizing plus a special agent that avoids the replacement, which make our product to be ideal for the use in automatic machines in areas with extra-hard water.
- Possesses a high descaling power even in kitchen tools with difficult access.
- Provides quick wrung and shinning finishes.
- It does not make the glass matt, but it enhance its original shine.
- Concentrated product, so that its performance is optimal, even using small dosages.

INSTRUCTIONS OF USE

• It can be dosed by hand/manually or using automatic dispensers. In any of the cases, we recommend to follow the instructions of the machine manufacturer.

Illustrative dosage

- 50-100 cc in machines of medium type.
- 0,1-0,3% en máquinas en general.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













VITROLUX

DISWASHER SHEEN





Dinner service and glassware sheen, special for using in automatic machines, facilitating the elimination of residues, salts and incrustations, maintaining the pieces with its original sheen.

APLICATIONS

It is a product very useful in all those places where automatic machines are used for the wash of dinner service, glassware, porcelain and crockery in general.

• We recommend its use in: hotels, restaurants, schools, hospitals, etc.

PROPERTIES

- Its use in the wash of dinner service and glassware help to extend the life of the machines, considering that at the same time that sheen, help to the elimination of the incrustations could have been formed in the circuit of drain of the dishwasher.
- Contains in its formulation chelating agents which protects the dinner service and glassware from the matt action that the use of automatic machines produce.
- Recover the glass, porcelain and crockery in general from a very thin layer that facilitates the wrung, reducing the dry time.

INSTRUCTIONS OF USE

- Due to its high concentration in active material, it is used adding a small quantity in the water of the last clarified, for this reason, it results to be a product with a big performance.
- The dosage to use will depend on the type of machine used, so that, we recommend to follow the instructions of the manufacturer of the machine.
- As illustrative datum, and in a general way, we recommend the use of 55 cc of product per one liter of water from the clarified.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.













VITROLUX-25

DISWASHER SHEEN





Dinner service and glassware sheen for automatic machines.

APLICATIONS

We recommend its use in all those places where automatic machines are used for the wash of the dinner service, glassware, porcelain and crockery in general.Hotels, cafeterias, restaurants, schools, hospitals, etc.

PROPERTIES

- Its use in the wash of dinner service and glassware help to extend the life of the machines, considering that at the same time that sheen, help to the elimination of the incrustations could have been formed in the circuit of drain of the dishwasher.
- Contains in its formulation chelating agents which protects the dinner service and glassware from the matt action that the use of automatic machines produce.
- Recover the glass, porcelain and crockery in general from a very thin layer that facilitates the wrung, reducing the dry time.

INSTRUCTIONS OF USE

- Due to its high concentration in active material, it is used adding a small quantity in the water of the last clarified, for this reason, it results to be a product with a big performance.
- The dosage to use will depend on the type of machine used, so that, we recommend to follow the instructions of the manufacturer of the machine.
- As illustrative datum, and in a general way, we recommend the use of 55 cc of product per one liter of water from the clarified.

Presentation

• 10L in box of 2 uds.





REPLAC

VITROCERAMIC CLEANER, METAL





REPLAC

Product specially formulated for the cleaning of vitroceramic hob; also for delicate metals, as the aluminum and in general any surface.

APLICATIONS

We recommend its use in: hotels, restaurants, cafeterias, schools, etc.

PROPERTIES

- Action highly degreasing.
- Clean and sheen in only one application.
- It is very easy to apply.

- Totally soluble in water.
- Biodegradable product.
- With its use the vitroceramic is maintained with its original sheen and aspect, as the first day.

INSTRUCTIONS OF USE

" STIR BEFORE USE IT "

The way to use our cleaner will depend on the application to do.

• CLEANING OF VITROCERAMIC:

Add some drops of product on the surface of the vitroceramic, extend them with a damp mop rubbing, wait a few seconds, rinse with a damp mop and with a dry mop proceed to dry and sheen it.

• CLEANING OF METALLIC SURFACES:

Proceed in the same way as the previous one

• CLEANING OF OVENS:

Dilute the product from a part of product per 3 of water to 1 of product per 6 of water, depending on the grease and dirt to eliminate, spray the surface to treat, leave to act during a few seconds and then clarified with a damp mop and dry with a dried mop.

- 500 cc in box of 24 uds.
- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.

















TROWEN

UNIVERSAL NEUTRAL DETERGENT



TROWEN

Powerful concentrated detergent, neutral character, due to its versatility of applications can be considered as universal detergent.

APLICATIONS

Recommended for the cleaning and maintenance of floors of: terrazzo, stoneware, marble, parquet, etc.

It is also years beloful in the cleaning of

It is also very helpful in the cleaning of leather, glass, windows, kitchens, sinks,

PROPERTIES

- Possesses a high power of penetration, attacking the most embedded grease, maintaining a big foam power, even with big quantities of grease, dust and dirt in general.
- Impedes the formation of calcareous incrustations, considering that contains sequestrant agents of calcium and magnesium ions, facilitating the rinse and the wrung of the water, without mating the shine.
- It is not affected by the hardness of the water, it possesses a neutral and constant pH during its use.
- It does not leave a thin soapy layer in the surface after the clarified.
- It does not produce irritations in the skin, even with the prolonged use.

INSTRUCTIONS OF USE

It is not recommended to use it in pure state, it is convenient to dilute before its use.

- General or maintenance cleaning: dilute a small part of product in a bucket of water and rub slightly the area to clean.
- Floors highly greasy mix a part of product in 20 of water.

• Linoleum, plastic, vinyl floors etc: mix in the proportion of 1 part of product in 60 parts of water.

AUTHORIZED ITS USE IN THE FOOD INDUSTRY

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.















SUAGEL

SKIN-CONDITIONING HANDWASH



Gel of pleasant odor prepared for the cleaning and hydration of hands.

APLICATIONS

We recommend its use in hotels, offices, restaurants, schools, airports, food industry, and in general in all the places where the presence of a handwash with high foam power and high softener characteristics are required.

PROPERTIES

- Possesses in its formulation surfactants with a high detergent power, sparkling and with softener characteristics.
- Soluble in water in any concentration. It does not contain organic solvents, being insoluble in them.
- It does not contain abrasive substances; for this it is ideal for people who need a constant cleaning.
- It does not produce irritations or dermatitis, due to its moisturizing and softener additives, providing to hands a soft touch and a pleasant aroma.

INSTRUCTIONS OF USE

- An excess quantity of product, does not improve its effect and properties, so that it is recommended to use it in small dosages, getting on this way an optimal result.
- Handwash: put a small quantity of product in the hands and rub until the dirt has emulsified, clarifying at the end with water.
- Personal hygiene: in shower or bath, it will be used previously diluted, one part of product in 8 or 9 of water.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.











ASEN

ANTI-BACTERIAL SKIN-CONDITIONING HANDWASH (ODOURLESS)



Conditioning handwash of surfaces. Its use is specially recommended in the cleanliness and cleaning of the personnel in the food industry.

APLICATIONS

The use of this product is recommended in:

- Food industry: factory of food products, restaurants, hotels, butcher's, fish's markets, cafeterias, etc.
- Public and private institutions; schools, nursery, etc.
- Hospital, veterinary clinic: in general, in all those places where there is manipulator personnel of food, and it is necessary the presence of a conditioner of surfaces before working.

PROPERTIES

- Ideal product to prepare surfaces before working.
- It does not produce irritations or dermatitis, due to its moisturizing and softener additives, providing to hands a soft touch and a pleasant aroma.

Soluble in water in any concentration.

INSTRUCTIONS OF USE

To do a suitable cleaning, apply a small quantity of product until getting an emulsion. After that, clarify with abundant water. An excess quantity of product, does not improve its effects or its properties, so that it is recommended to use it in small dosages, getting on this way an optimal result.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













VAJILIN-INDUSTRIAL

SPECIAL CATERING WASHING-UP LIQUID



APLICATIONS

Manual wash of dinner-services. materials and tools used in the food, restoration and catering industry.

Very useful in schools, cafeterias, hospitals, etc.

PROPERTIES

- Possesses a neutral character, for this reason it does not irritate the skin, it does not produce sensitivity in people with delicate skin, it does not dry the skin out.
- Maintains an exceptional sparkling power, even against big quantities of grease in emulsion, what makes it especially indicated for the manual wash of dinner-services and kitchen's tools, to those provide a perfect clea-
- It does not make the glass matt, polishing it and facilitating its wrung.
- In its formulation contains sequestrant additives of calcium and magnesium ions, so that it facilitates the wrung of the dinner-service, avoiding whitish spots due to the hardness of the water.

Present the following advantages:

- The quantity to use is minimum, being a product with high economy and performance.
- Save time and work, because it facilitates the wrung.
- Clean and eliminate the grease quickly.
- It does not damage the sheen of the glass or crockery, emphasizing its natural beauty.

INSTRUCTIONS OF USE

Due to its high concentration that possesses in active material, it admits dilutions until 1 part of product for 80 parts of water, giving an optimal performance with a high economy.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.















VAJILIN-concentrado

CONCENTRATED WASHING-UP LIQUID





Neutral detergent special for the manual wash of dinner-services, materials and tools used of dinner-services, materials and tools used in the food, restoration and catering industry.

APLICATIONS

Manual wash of dinner services, materials and tools used in the food, restoration and catering industry. Very useful in schools, cafeterias, hospitals, etc.

PROPERTIES

- In its formulation contains sequestrant additives of calcium and magnesium ions, so that it facilitates the wrung of the dinner-service, avoiding whitish spots due to the hardness of the water.
- Possesses a neutral character, for this reason it does not irritate the skin, it does not produce sensitivity in people with delicate skin, it does not dry the skin out.
- Maintains an exceptional sparkling power, even against big quantities of grease in emulsion, what makes it especially indicated for the manual wash of dinner-services and kitchen's tools, to those provide a perfect cleaning.

 It does not make the glass matt, polishing it and facilitating its wrung allowing to keep its original sheen.

Present the following advantages:

- The quantity to use is minimum, being a product with high economy and performance.
- Save time and work, because it facilitates the wrung.
- Clean and eliminate the grease guickly.
- Keep the original sheen in crockery and glassware.

INSTRUCTIONS OF USE

- Due to its high concentration, it accepts dilutions in water to 1:100, giving an optimal performance with big economy.
- The surfactants that contains in its formulation act in the interface water-grease, so if we add to the water an elevate quantity of product, it will stay molecules of the detergent which could occupy the interface, so that we could be wasting the product.
- As consequence, we recommend to use the product diluted in water, doing the necessary dilutions for 2 or 3 working day.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.















VAJILIN-MAX

MAXIMUM CONCENTRATION WASHING-UP LIQUID (HAND- WASHING)



VAJILIN-MAX Manufacture of the second of the

Possesses a highest power of penetration, attacking the most embedded grease, maintaining a maximum sparkling and moistening power, even in big quantities of grease, and dirt in general.

APLICATIONS

Maximum concentration washing-up in active material. Possesses a highest power of penetration.

The use of our diswashing is very useful in: restaurants, hotels, schools, etc.

PROPERTIES

- Possesses a highest degreasing power, as in its composition exist solubilizer of grease agents in a maximum concentration.
- Avoid the formation of whitish sports produced by calcium and magnesium ions of the water, considering that in its formulation has incorporated sequestrant agents from the same, facilitating the rinse and wrung of all the tools, keeping its original sheen.
- Although it possesses a maximum foam power, it does not leave foam layers after the wash, considering that in its formulation it has incorporated solubilizer agents.
 It can be manipulated without taking special preventive measures.

It presents the following advantages:

- The quantity to use is minimum, being a product with high economy and performance.
- Clean and eliminate all types of greases and dirt quickly.
- It does not damage the sheen of the glass or porcelain, and it stands out its original beauty.
- Save time and work, because it facilitates the wrung.

INSTRUCTIONS OF USE

- Due to its high concentration in active material, it admits dilutions until 1 part of product for 250 of water.
- It is not convenient to use the pure product, considering that it has a maximum concentration in active material and it would be a waste.
- We recommend to do dilutions of the product which will be used in 2 or 3 days.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













SANIFOAM

ALKALINE FAT-REMOVER FOAM FOR FOOD USE



SANIFOAM SANIFO

Product specially indicated for the cleaning of surfaces, ovens, metallic elements, extractors, etc, except of aluminum, iron, galvanized surfaces, of use in the food industry.

APLICATIONS

Very useful in the cleaning and degreasing of facilities related with the food industry, industrial kitchens, cold meat factories, industrial ovens, etc.

PROPERTIES

- Product formed by a complex mixture of alkaline agents, degreesing, sequestrants, solvents, surfactants, stabilizers of foam and corrosion inhibitors.
- Allows the cleaning of metallic stainless steel surfaces, extracting the most adhered grease and dirt without producing alterations in the sheen or finish.
- Produces abundant foam, being appropriate for the cleaning by high pressure machines.
- Facilitates the cleaning and maintenance work of the facilities, allowing the optimization of hygienic processes of facilities.

INSTRUCTIONS OF USE

- It is applied by spraying or with machine of foam generation, diluting the product in water, according to the dosage of use. Leave to act the product during 5-15 minutes and after that rinse with drinking water by medium or high pressure.
- As dosage of employment, apply dilutions of 1-5% in water, according to the grade of dirt or embedded of the grease to eliminate. The temperature of work will be between 20-80 C.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.













SANILUX

AMMONIA-BASED LAVATORY CLEANER





APLICATIONS

We recommend its use in: hospitals, hotels, restaurants, cafeterias, party rooms, official organisms, schools, service stations, theaters, etc.



Product very effective in the cleaning of bathrooms, sanitarian, public toilets, floors very dirty and in general, in all processes of cleaning where an energetic action of detergent is necessary.

PROPERTIES

- Cleaning product which joins the high detergent power of the ionic surfactants with the solvent action and degreasing of the ammonia.
- Highly concentrated product.
- The hygiene which is created with its use, is complete, for this it is not necessary the use of more cleaning products
- It does not leave any type of residue, and it is perfectly compatible with any type of water.

- Completely effective with all the dirt varieties, including extreme cases.
- After its use, the pieces will offer a magnificent aspect, and a very pleasant clean odor will be in the atmosphere.
- Meets the international rules about biodegradability.
- Results very economical due to its concentration and efficiency.

INSTRUCTIONS OF USE

- An excess of product does not improve its effects or properties, so that it is recommended to use it in small dosages, getting on this way an optimal result.
- Cleaning of sanitarian, sinks, baths, tiles, etc:
- $5\,cc.$ of product per liter of water.

- Cleaning of floors:
- Diary cleaning:

40 cc per bucket of water (8liters)

- Very dirty floors:

80 cc per bucket of water (8liters)

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.













REVI-BAÑO

BATH CLEANING DETERGENT



New product specially formulated for the cleaning and hygiene of varnished and useful surfaces of the sanitarian. Ideal for the maintenance of a clean atmosphere and without bad odors.

APLICATIONS

We recommend its use in planes, trains, boats, buses of long journeys etc.

- In general in all close circuits where it is required a maximum hygiene and cleaning.
- Its hygiene and cleaning power, and its aromatic are effectives such in pure state as in dilutions in water until the 10% (90 parts of water and ten of product) producing an important save in HANDLING and solving the problem with bad odor in flights and cruises, as also in long terrestrial journeys.

PROPERTIES

- Clean and polish in the same application.
- It does not attack the metallic surfaces, or aluminum to which provides cleaning and hygiene enhancing its original shine.
- Maintain its original shine in the glossy crockery.
- Maintain the services with a pleasant and permanent aroma.
- Added to the 10% to the water sanitary tanks which trains, boats and buses of long journeys use, guarantee water in perfect conditions of hygiene for the cistern.

INSTRUCTIONS OF USE

Its use is indicated specially for the cleaning and hygiene of cisterns, bombs, filters, etc, increasing the length of the same

• Treatment of cisterns: deep cleaning and hygiene of the bomb.

Leave the bomb to soak in the product diluted at the 10% (I part of product in 9 parts of water) during 12 hours and after that rinse with pressure water or vapor.

• **Treatment of toilets:** Apply the pure product, without dilution, under the toilet seat, brush well and make the water of the cistern run.

- Treatment of the sanitary tile in general: Apply pure or diluted depending on the dirt to eliminate and the state of the surface to treat, with sponge or scourer in all the surfaces, including the taps and after that rinse with water. It is not necessary to dry.
- Purifying/Air freshener: Dilute one part of product in 20 of water.
- Treatment of the water destined to the services of boats, planes, trains, buses of long journeys, etc: Add to the tank or container of water a concentration of 10%.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.













BACTERI-FUN

ANTI-BACTERIAL DISINFECTANT CLEANER





Disinfectant based on quaternary ammonium specially indicated for the disinfection by contact: surfaces and equipments of use in the food industry.

APLICATIONS

- It is used in the disinfection of contact of surface, tools and equipment related with the food industry.
- Very useful in the cleaning and disinfection of floors, walls, ceiling from slaughterhouse, storages, smoke factories, etc of facilities related to the food industry.
- Product with high performance which allows meeting with the strict rules of cleaning and disinfection of hygiene programs in all types of food industry.

PROPERTIES

- Contains derivatives of quaternary ammonium, very effective in the control and disinfection of all types of surfaces.
- Due to its cationic character, it is very effective against all types of dirt, what allows getting an appropriate cleaning and disinfection where it is required.
- Acts on the microorganisms caused of the fermentation and putrefaction processes, so that its use allows to finish with the processes which cause bad odors, facilitating the maintenance of the surfaces, places and equipments where it is applied in perfect state of cleaning and hygiene.
- Its high moisturizing power allows to get to all the places, doing a residual action, which guarantee a complete disinfection.
- It is soluble in any proportion of water and its effectiveness is not affected by a change of hardness in the water.
- Product tested in independent laboratory, meeting with the regulation UNE-EN 13697 versus to 4 trial microorganisms.

INSTRUCTIONS OF USE

"For the purpose of avoid risks to people and environment, follow the instructions of use". Before using the product, read carefully the label.

Instruction of use, contact disinfection: spray and immersion with diluted product in water. Before the application of this product, a cleaning would be done. Use dilutions of the 2% in water, maintaining a contact time of 5 minutes on the surface.

The application of the product in the food industry for the use in disinfection by contact: surfaces and equipments, without the presence of food.

All the necessary measures will be taken so that, the food, machinery and tools which are manipulated in the previous treated places with the product do not contain residues of any of its components. For this, the treated parts will be clarified with drinking water.

It mustn't be mixed with other chemical products.

Ventilate correctly before entering in the place. Incompatible with anionic substances and oxidant agents.

Meets the regulation UNE-EN 13697 in clean conditions: chemical antiseptics and disinfectants. Quantitative test of non-porous surfaces for the evaluation of bactericide activities of the chemical disinfectants used in food products, in the industry, at home and in collectivities.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.











BACTERI-GEL

INDUSTRIAL STRENGTH ANTI-BACTERIAL DETERGENT





Disinfectant based on quaternary ammonium specially indicated for the disinfection by contact: surfaces and equipments of use in the food industry.

Application exclusively by specialized personnel.

APLICATIONS

It is used in the disinfection of contact of surface, tools and equipment related with the food industry.

- Very useful in the cleaning and disinfection of floors, walls, ceiling from slaughterhouse, storages, smoke factories, etc of facilities related to the food industry.
- Product with high performance which allows meeting with the strict rules of cleaning and disinfection of hygiene programs in all types of food industry.

PROPERTIES

- It contains derivates of quaternary ammonium, surfactants and additives very efficient in the control and disinfection of all types of surfaces.
- Due to its cation character and content in non-ionic surfactants, it is very efficient against all types of dirt, what allows getting an appropriate cleaning and disinfection where it is required.
- Acts on the microorganisms caused of the fermentation and putrefaction processes, so that its use allows to finish with the processes which cause bad odors, facilitating the maintenance

of the surfaces, places and equipments where it is applied in perfect state of cleaning and hygiene.

- Decreases the superficial tension allowing the emulsion and elimination of the dirt in a small place.
- Its high moisturizing power allows to get to all the places, doing a residual action, which guarantee a complete disinfection.
- It is soluble in any proportion of water and its effectiveness is not affected by a change of hardness in the water.
- Product tested in independent laboratory, meeting with the regulation UNE-EN 13697 versus to 4 trial microorganisms.

INSTRUCTIONS OF USE

"For the purpose of avoid risks to people and environment, follow the instructions of use". Before using the product, read carefully the label

Instruction of use, contact disinfection: spray and immersion with diluted product in water. Before the application of this product, a cleaning would be done. Use dilutions of the 2% in water, maintaining a contact time of 5 minutes on the surface.

After that, rinse with abundant water and dry the surface with a clean mop.

For the cleaning of floors, use 10ml per liter of water, applying a dilution with mop.

The application of the product in the food industry for the use in the contact disinfection: surfaces and equipments, it will be done in absentia of food. All the necessary measures for the food will be taken, so that the food, machinery and tools which are manipulated in the treated facilities with the product, do not contain residues of its components. For this, it will be correctly rinse with abundant drinking water. Do not mix with other chemical products. Ventilate before entering to the place.

Incompatible with organic material, anionic detergent, ammonia derivatives and hypochlorite.

Incompatible with chromium, lead, aluminum, tin, zinc and their alloys (bronze, brass, etc.)

Meets the regulation UNE-EN 13697 in clean conditions: chemical antiseptics and disinfectants. Quantitative test of non-porous surfaces for the evaluation of bactericide activities of the chemical disinfectants used in food products, in the industry, at home and in collectivities.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













SAUNAS-BAC ANTI-BACTERIAL CLEANER FOR SPORTS FACILITIES







Detergent and cleaner specially indicated for saunas and sports facilities. High effectiveness in the cleaning and hygiene in atmospheres of dampness and temperatures that the gyms, saunas...etc provide. Eliminates unpleasant odors.

APLICATIONS

We recommend its use in all sports facilities: saunas, gyms, massage rooms, etc.

It is also very useful in sinks, showers, etc, in hotels, restaurants, service stations, etc.

PROPERTIES

- Made based on a mixture of non-ionic surfactants and cationic, with a pleasant perfume.
- High penetration power, extract the dirt in the most embedded parts, making easier the works of cleaning and hygiene.
- High efficiency in the cleaning and hygiene in atmospheres of dampness and temperatures that the gyms, saunas, etc provide.
- This product eliminates the unpleasant odors, impeding also, the putrefaction processes.

INSTRUCTIONS OF USE

- Attack or first dosage: add 1 liter of product per 20 of water, and spray on walls, floors, and also in the most difficult parts to access.
- Maintenance dosage: add 1 liter of product per 30 of water, being able to use pulverized or the usual mopped of floors, walls, etc.

We recommend paying attention to the lowest parts in saunas, showers, locker rooms, tables, etc, where the damp conditions and temperatures favor the dirt proliferation.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













XITOL

SCALE REMOVER, RUST REMOVER, DE-GREASER





Effective cleaner with the natural power of lemon.

A mix of organic acids, wetting agents and grease solvents that make it the ideal product for descaling, removing rust and degreasing any type of surface.

APLICATIONS

Xitol is a powerful three in one total cleaner with many uses:

- De-scaling lime from clay and ceramic floors in general, natural and artificial stone and other porous surfaces, both interior and exterior.
- Removing oxide from all types of metal such as iron, aluminum, steel, etc.
- De-greasing and cleaning floors, sanitary ware, taps, ceramics in kitchens and bathrooms, etc.
- Ideal for cleaning joints between tiles, both horizontal and vertical, because of its viscous texture.

PROPERTIES

- Has excellent penetration power, wetting any surface.
- De-scales, removes rust and de-greases in a single application; it is not necessary to complement it with other chemical products.
- Pleasant lemon smell.

- Has great thyxotrophic power, that is, it does not run on vertical surfaces.
- The surface from which rust has been removed remains rust-free for a long time, without any additional treatment.

INSTRUCTIONS OF USE

The product is used differently depending on the application. It can be applied by spray, brush or immersion.

- Scale remover: Depending on the degree of scaling on the surface, it can be used pure or diluted in up to 10 parts of water.
- Rust remover: Depending on the degree of oxidization and its age and the quality of the metal, it can be used pure or diluted in up to 3 parts of water; the surface must be dried thoroughly to prevent further rusting.
- **De-greaser:** Can be diluted in up to 10 parts of water, depending on the amount of dirt. In all cases, the surface must be rinsed thoroughly with

Presentation

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.







water.









QUISOL

MULTIPLE ACTION CHEMICAL CLEANER







Product based on a complex and perfectly balanced combination of wetting inorganic acids that are powerful rust inhibitors, especially designed for completely removing products based on limestone or clays in general.

APLICATIONS

Recommended for use in cleaning:

Mineral substrates in building:

- Tiles.
- Exposed brickwork.
- Cement floors.
- Swimming pools.
- Public fountains.
- Natural and artificial stone

Metallic substrates:

- Coffering plates.
- Tools.
- Machinery in building and civil engineering, etc.

PROPERTIES

- The wetting agents in its formula reduce surface tension, thus increasing the reaction speed.
- Its corrosion inhibitors make this product recommendable for cleaning metal tools, facilitating the removal of stains caused by rust and aluminum oxide.
- The product's acidic components dissolve lime scaling and other elements in general, removing them in the cleaning and rinsing processes

INSTRUCTIONS OF USE

Can be applied by brush or spray.

Mix: Depending on the state of the substrate to be treated, it can be used pure or diluted by at most 1:12 in water.

Dilution tests should be carried out to find the optimum level for each situation.

When applied to metallic substrates, these must be fully rinsed with water and dried to prevent further rusting.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.















HIGINEL

DISINFECTANT BACTERICIDAL-FUNGICIDE OF CONTACT FOR USE IN THE FOOD INDUSTRY (HIGH FOAM POWER)





Disinfectant bactericidal-fungicide of contact surfaces and equipments of use in the food industry. Application exclusively by specialized personnel. High foam power what allows the disinfection of tools, facilities, surfaces, floors, etc, in the food hygiene.

APLICATIONS

- Cleaning and disinfection of contact, surfaces, equipments and facilities where a strict microbiologic control is required.
- The continuous use of the product avoid crossed contaminations and allow to meet the strict levels of hygiene on the food industry.
- Cleaning and disinfection of equipments, storage tanks, pipes, etc, without necessity of dismantle (cleaning CIP).
- Cleaning and disinfection of facilities, machinery, floors, walls, tools, storage tanks, cold meat factories, milky industry, and in general in those places where is required to control citric points in hygienic plans.

PROPERTIES

- Made by a mixture of disinfectants based on sodium hypochlorite as active ingredient with foaming surfactants, sequestrant additives, dispersants and corrosion inhibitors, all of them stabilized in alkaline media.
- In its action, it combines the cleaning and disinfection in only one operation. Apt for the CIP CLEANING (Clean in place).
- High moisturizer and degreasing power reaching all the difficult parts.
- Acts saponifing the grease and any type of dirt eliminating the embedded dust and at the same time works as a high power of cleaning.
- Contains sequestrants additives, dispersants and corrosion inhibitors which avoid the crystallization of dissolved

salts and its re-deposition in the surfaces which are being cleaning.

- High foam, it can be used in the cleaning of walls, ceilings, vertical interior walls by a high pressure bomb. As it produces foam, this increases the contact surface, so that, the product can clean a higher specific surface with less quantity of product.
- Effective against a wide number of microorganisms, bacterium (Gram+ yGram-), virus, fungus, etc.
- Its effectiveness is not altered by the hardness of the waters.
- Meets the regulation UNE-ENI3697 in dirty conditions.
 Antiseptics and chemical disinfectants. Quantitative trial of non-porous surface for the evaluation of the bactericidal and fungicide activity of the chemical disinfectants used in food products, in the industry or at home.

INSTRUCTIONS OF USE

Instruction of use for contact disinfection: surfaces and equipment by spraying, washed or immersion with the product dissolved in water.


- Bactericidal effect: dilute the product at the 3% in water. Apply the solution and keep a contact time of 5 minutes.
- Fungicide effect: dilute the product at the 0,25% in water, keeping a contact time of 15 minutes. After that, rinse with drinking water and dry the surface with a clean mop.

• Cleaning of floors in slaughterhouses and facilities in general, clean the surfaces with a solution at the 3% in water, keeping a contact time of 5 minutes.

The application of the product in the food industry for contact disinfection use: surfaces and equipments, it will be done without presence if food. It would be rinsed with drinking water the treated surfaces before its use. Do not mix with another chemical product.

Incompatible with acid products, ammonia and reducer agents.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.



CLORAGEL

DISINFECTANT BACTERICIDAL-FUNGICIDE OF CONTACT FOR USE IN THE FOOD INDUSTRY (LOW FOAM POWER)





Disinfectant bactericidal-fungicide of contact surfaces and equipments of use in the food industry. Application exclusively by specialized personnel. Low foam power what allows the disinfection of tools, facilities, surfaces, floors, etc, in the food hygiene.

APLICATIONS

- Cleaning and disinfection of contact, surfaces, equipments and facilities where a strict microbiologic control is required.
- The continuous use of the product avoid crossed contaminations and allow to meet the strict levels of hygiene on the food industry.
- Cleaning and disinfection of facilities, machinery, floors, walls, tools, storage tanks, cold meat factories, milky industry, and in general in those places where is required to control citric points in hygienic plans.

PROPERTIES

- Made by a mixture of disinfectants based on sodium hypochlorite as active ingredient with surfactants of law foam, all stabilized in alkaline media.
- In its action, it combines the cleaning and disinfection in only one operation.
- High moisturizer and degreasing power reaching all the difficult parts.
- Acts saponifing the grease and any type of dirt eliminating the embedded dust and at the same time works as a high power of cleaning.
- Low foam, decrease the consumption of water in the rinse of the disinfected surfaces.
- Effective against a wide number of microorganisms, bacterium (Gram+ yGram-), virus, fungus, etc.
- Its effectiveness is not altered by the hardness of the waters.
- Meets the regulation UNE-ENI3697 in dirty conditions.
 Antiseptics and chemical disinfectants. Quantitative trial of non-porous surface for the evaluation of the bactericidal and fungicide activity of the chemical disinfectants used in food products, in the industry or at home.

INSTRUCTIONS OF USE

Instruction of use for contact disinfection: surfaces and equipment by spraying, washed or immersion with the product dissolved in water.

- Bactericidal effect: dilute the product at the 3% in water.
 Apply the solution and keep a contact time of 5 minutes.
- Fungicide effect: dilute the product at the 0,25% in water, keeping a contact time of 15 minutes. After that, rinse with drinking water and dry the surface with a clean mop.
- Cleaning of floors in slaughterhouses and facilities in general, clean the surfaces with a solution at the 3% in water, keeping a contact time of 5 minutes.
- The application of the product in the food industry for contact disinfection use: surfaces and equipments, it will be done without presence if food. It would be rinsed with drinking water the treated surfaces before its use. Do not mix with another chemical product.
- Incompatible with acid products, ammonia and reducer agents.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.













SILKY SKIN CONDITIONING GEL



Viscous gel with pearl aspect and very pleasant odor, formulated carefully by an equilibrated mixture for the cleaning, conditioning and conservation of the hands.

APLICATIONS

We recommend its use in: hotels, offices, storages, restaurants, schools, service stations, airports, and in general in those places where the presence of a handwash product with high foam power and high softener characteristics is required.

PROPERTIES

- Possesses in its formulation surfactants of high detergent and foam power, as also softener and moisturizing agents, what make it ideal for the cleaning of hands or even personal hygiene.
- Its moisturizing components provide a soft touch and very pleasant odor to the hands.
- It does not produce dermatitis or irritations, although using it frequently.
- It does not contain organic solvents, being insoluble in them.
- It does not contain caustic or abrasives substances, neither inorganic thickener.
- Possess good stability against hard waters.

INSTRUCTIONS OF USE

- An excess of product does not improve its effects or properties, so that, it is recommended to use it in small proportions, getting a performance more effective and a bigger economy.
- For the cleaning of hands, put a small dosage of product and rub until all the dirt is emulsified , rising after that with abundant water.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.















REVIGER

INSTANT ANTI-BACTERIA

Instant anti-bacteria handwash cleaner without rising for those places where thereis no water. Solve hygienic problems in emergency situations. Dries quickly allowing the cleaning without leaving tacking or stickiness and providing a pleasant sensation of freshness in the skin.



APLICATIONS

We recommend it in the cleaning of hands without rising in all types of activities related to the food industry.

• Allows the hygiene of hands of the personnel in sanitary emergency, ambulances, doctors, nurses, etc.

PROPERTIES

- Made in base of a hydroalcoholic mixture which allows the washing of hands with a quick dry, keeping a soft and fresh touch.
- Clean without necessity of rinse, what allows the cleaning of hands in situations where there is no water and soap for a deep cleaning.
- It can be used as many times as necessary, without producing allergic reactions in the skin.
- Dry quickly by rubbing, without necessity of towel, providing clean hands and without stickiness.

- Very useful in the maintenance of the personal hygiene in police actions, forensic situations, funeral parlor, etc.
- Eliminates the dirt sensation when, exploration functions with latex gloves, police frisking, registers to drug addicts, etc are done.
- Allows the prevention of possible transmission of infections illness after a contact with a source of contamination, so that, its use is very useful in dental clinics, medical consultation, health centers, hospitals, etc.

INSTRUCTIONS OF USE

It is used as it is original in its container. Apply a small quantity of product on the area to clean. Rub and wait until the product is dry, maintaining a contact time of 1 minute approximately.

It provides soft and fresh hands. Perfumes the hands lightly with a pleasant lemon aroma.



- 75 cc in box of 20 uds.
- 500 cc in box of 24 uds.
- 1L in box of 20 uds.
- 5L in box of 4 uds.



VILIM

WINDOW CLEANER



VILIM

Product specially elaborated for cleaning, polishing and maintaining in perfect state all types of glass or mirrors.

APLICATIONS

We recommend the use of our window cleaner, in the cleaning and maintenance of all glazed or vitrified surfaces, to make them look shining as the first day.

PROPERTIES

- Clean and polish in only one application.
- It does not attack any type of metal, for this reason, at the same time that cleans the glass, it can treat the metallic surface without risk to be damaged.
- It does not attack any type of washable paint.
- Dries quickly.
- Pleasant aroma.

INSTRUCTIONS OF USE

Spray the area to treat with a small part of product, passing a clean mop in all the surface, rubbing on circles in order to extract all the dirt, until the surface is completely clean and shine.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.
















MILUSOS

MULTI- PURPOSE ANTI-DUST GRIME CLEANER

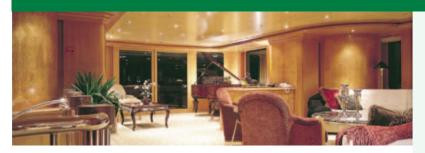



Cleaner-polishing of general use, which finishes with the dust and dirt in windows, marble, artificial woods and any type of polished surface.

APLICATIONS

- Cleaning of windows, glasses and polished surfaces, using it very diluted.
- Cleaning of marble floors.
- Eliminates spots from glasses, when they are left in surfaces as tables, bars, etc.
- As anti-dust in any type of surface.
- In general, as multi-purpose product to use in: hotels, restaurants, hospitals, etc.

PROPERTIES

- Clean, protects and polishes in only one application, leaving a microscopic layer which works as repellant action with water, dust and dirt.
- Provides to the treated surface, a big resistance against the ageing, due to the atmospheric agents (oxygen, ozone, water, light) and also to the rusting or hydrolysis.
- Presents a great chemical inertia, so that it does not bleach or turn the surfaces yellow, even when some layers are accumulated.
- Possesses dielectric and little sensitive to the thermal variation properties, what allows its use in a wide range of temperatures.
- Dries in shortly time and it does not contain wax, acids or surfactants which could attack or damage the treated
- Admits dilutions in water (until 1 part of product per 10 of water) what makes being a profitable and economic product

INSTRUCTIONS OF USE

- It can be used pure or diluted, by spray or mop.
- When it is used by spray, impregnate the surface to treat with the product, and after that rub until the mop moves softly.
- When it is used by mopping, impregnate the mop with the product, extend it softly in the surface, rubbing in all the directions until eliminate all the dirt.
- Floors: 80 cc per bucket of water (8 liters).
- Cleaning of polished surfaces: 1 part of product `per 6 of water.
- Glasses and mirrors: 1 part of product per 10 of water.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.















SEDELLA

MULTI-PURPOSE CLEANER



Multi-purpose cleaner recommended in a wide number of applications, which acts quickly and powerfully on any type of surfaces. Possesses a high content in active material, and it is totally soluble in water.

APLICATIONS

The scope of applications of this product is extensive, given the different dilutions which it admits:

- Cleaning of any type of surface in: hotels, restaurants, schools, theaters, offices, cinemas, etc.
- Cleaning of the car's interiors: automotive industry.
- Cleaning of all types of all types of furniture and tiles in bathrooms.

PROPERTIES

- High cleaning power with a very pleasant aroma. It does not leave veil and it does not mist over the treated surface.
- Acts quickly and energetically in all types of materials.
- It does not attack the metallic surfaces, or the aluminum ones.
- It is very easy to apply, this with the versatility of applications make the product ideal as multipurpose cleaner.
- It is not irritating or corrosive, it is not necessary to take especial precaution measures during its manipulation.

INSTRUCTIONS OF USE

It can be used pure or diluted until 100 parts of water, by spray or mop.

The recommended dilution and the instruction of use will depend on the application and dirt of the surface.

- **Spraying:** spray a small quantity of product (pure or diluted) in the surface to treat, spread the product rubbing with a damp mop and then remove it with a dry and clean mop.
- **Mopping:** rub the surface directly with a damp op in the product (pure or diluted) and then remove with a dry and clean mop.

Presentation

• 10L in box of 2 uds.





MULTI-REVIMCA MULTI-PURPOSE DETERGENT





Multi-purpose cleaner recommended in a wide number of applications, which acts quickly and powerfully on any type of surfaces. Possesses a high content in active material, and it is totally soluble in water.

APLICATIONS

The scope of application of this product is extensive, given the different dilutions that it admits:

- Cleaning of floors in all types of places.
- Cleaning of bathrooms, both domestics and institutional: hotels, restaurants, clinics, etc.
- Cleaning of car's interiors.
- Cleaning of greasy surfaces: restaurants, hotels, etc.

PROPERTIES

- Complex and equilibrated mixture of surfactants and solvents which guarantee a powerful effect on any type of surface
- It does not leave veil and it does not mist over the treated surface.
- Dilutions with different concentrations cover applications from very greasy surfaces to the cleaning of baths, marbles, tiles, etc.
- It is very easy to apply, this with the versatility of applications make the product ideal as multi-purpose cleaner.
- It is not irritating or corrosive, it does not damage metallic surfaces and it is not necessary to take especial precaution measures during its manipulation.

INSTRUCTIONS OF USE

The recommended dilution and the instructions of use will depend on the dirt of the surface to treat.

- Cleaning of greasy surfaces as: metallic plate, burners. kitchen furniture, kitchen worktop, etc. Use the pure product if there is excessive grease or apply the diluted product in water in the proportion of 1:1 if the grease to treat has medium.
- Cleaning of baths, or glazed surfaces: dilute the product in water in proportion 1 part of product per 5 of water, and apply it by spray or mop.
- Cleaning of floors: both institutional and domestic floor or, smooth surface of marble, terrazzo, ceramic brick, etc; 80 cc per bucket of water (8liters) if the dirt is normal. In very dirt floors as in butcher's shops, supermarkets, workshops, etc. The dosage will be of 200 cc per bucket of water (8liters).

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.











ALUTEC

ALUMINUM, COPPER AND BRASS CLEANER-POLISH







New product elaborated specially for the treatment and maintenance of the cleaning and polishing of the aluminum, copper and brass.

APLICATIONS

- Cleaning, polish and shine of the aluminum, copper and brass.
- Cleaning companies, reparation in metallurgic workshops.
- Shipyards, marine, airports, etc.
- Car parks, transport companies, service stations, etc.

PROPERTIES

- Product highly concentrated.
- Product quick and efficient, clean and polish the surface at the same time.
- The treated metal is impregnated with a microscopic layer which protects during a certain time from new attacks.

INSTRUCTIONS OF USE

- Being a product highly concentrated; it can be used with high dilutions in water; although in extreme cases of dirt, is better to use it in pure state.
- The ways to use it are: by spray, immersion or mop.
- The dilution to use will depend on the state of dirt of the surface to treat.

Very dirt: use it in pure state or 1 part of product in 1 part of water.

Less dirt: 1 part of product in 10 parts of water.

• Once the product is applied, rub in circles, leave to act a few minutes, after that, rinse with abundant water. If you want to polish, it would be convenient to dry the surface.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.













TAPIMOX

CARPET, UPHOLSTERY AND RUG CLEANER





Ideal product for the care and cleaning of carpets, fitted carpets, upholsteries, etc.

Complex mixture and completely equilibrated of anionic and nonionic surfactants with high sparkling power with antistatic additives which take the dust and restore the colors.

APLICATIONS

We recommend its use for both domestic and institutional use.

- •Domestic use: cleaning and maintenance of carpets, fitted carpets and upholsteries.
- •Industrial use: theaters, hotels, restaurants, museums, buildings, trains, buses, etc.

PROPERTIES

- •The foam which is applied, extract easily all type of dirt due to the reduction of interfacial surfactants, consequence of the presence of the surfactants in its formulation, emulsifying them to facilitate its later retreat with the foam.
- •When the foam is drying, a dry residue is created, which is easily eliminate.
- •Make longest the life of the cloths where it is applied, as the humidification is minimum.
- •Possesses **a quick dry**, allowing to the treated parts the possibility of being used again in a short period of time.

INSTRUCTIONS OF USE

Highly concentrated product, so that it admits important dilutions which vary with the use mode.

- •Manual cleaning: dilute 1 part of product in 7-8 parts of water and stir strongly; so the foam we will apply, it will be produce.
- -Brush the carpet or fitted carpet with the purpose of eliminating the heavy exterior dirt. After that, apply the foam by a sponge or brush.
- -Leave to dry during a few minutes, and the last is to remove the foam with a brush or hoover.
- •Mechanic cleaning: dilute 1 part of product with 12-15 parts of water, and follow the instructions of the manufacturer of the machine.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













GLEYSE

WOOD-NOURISHING SHEEN





Product for the maintenance, conservation and shining of the wood, formulated by a homogeneous combination and perfectly equilibrated of mineral oils, nutrients and special emulsifiers.

APLICATIONS

The scope of application of this product is wide, being applicable on any type of wood, as in:

- Parquet floors.
- All types of furniture.
- •Teak wood of boats and garden's furniture.
- Interior and exterior doors.

PROPERTIES

- •Cleans, nourishes, and shines the wood in only one application, enhancing its original shine.
- •Protects the varnish and avoids the reposition of the dust due to the antistatic layer which is produced on the treated surface.
- •Avoid the natural drying of wood, and the apparition of leaks when the dampness is regulated.
- •The effect produced on the treated surface remains during a long period. As maintenance, it is needed only to pass a dry mop on the treated surface to maintain the sheen already got.
- •It is ideal for maintaining the furniture, as it keeps them as the first day.

INSTRUCTIONS OF USE

- •It is not necessary to use a big quantity of product, due to its high concentration in active material, the product could be waste.
- •It can be applied by spray, or by mopped, as it is indicated in its container.
- •For big surfaces, it admits dilutions until a 50 % in water, giving a great performance.
- •Spray all the surface with a spray or impregnate a mop in the product and pass it in all the surface.
- •Rub good the surface with a mop until all the spots disappear, and after that pass a clean and dry mop to get shine.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.















GRASOLOR

ODOUR AND FAT REMOVERODODOUR AND FAT REMOVEROUR AND FAT REMOVER





Preventive treatment of odours and fats for areas at risk of build-up of sludge,organic waste, etc. A complex mixture of halogenated benzene derivatives in orthoposition, surfactants, etc.

APLICATIONS

Our odour and fat remover is ideal for use in:

- •Wastewater-treatment facilities, sewers, entrance mouths, storm drains, etc.
- Areas of continuously high levels of deposited fats and oil, such as: abattoir floors, meat-processing plants, etc.
- •Landfills and rubbish tips, skips, containers and rubbish-collection trucks.

PROPERTIES

- •Removes unpleasant odours emanating from plugholes of washbasins, bidets, showers, bathtubs, etc, and prevents odours from recurring.
- •Eliminates build-up of fats and sludge in pipes and machinery at wastewater-treatment plants, without affecting activated sludge.
- •**Reduces clogging** and helps maintain the free circulation of liquids through the system.
- •Does away with problems caused by insects, by keeping them away.
- •Contains no alkaline or corrosive substances that could damage the installation in any way.

INSTRUCTIONS OF USE

Highly concentrated product. Do not use without diluting first. Dilute in water with 1 part product per 10-100 parts water.

•Cleaning:

- Rubbish trucks and collection bins: Dilute 1 litre of product per 1000 litres of water.
- Rubbish areas and bins: Dilute 1 litre per 100 litres of water.

Septic tanks:

The dosage will depend on how dirty the wastewater is. To serve as a guide:

For a 3,000-litre tank:

Very dirty water: Dilute 10 litres of product in 100 litres of water and pour uniformly into the tank. Dirty water: Dilute 1 litre of product in 100 litres of water and pour uniformly into the tank.

- 1 Kg. in box of 12 uds.
- 5 Kg. in box of 4 uds.
- 10 Kg. in box of 2 uds.









TUBEFON

DRAIN UNBLOCKER



TUBEFON

Powerful drain unblocker that acts by chemical reaction against dirt, removing accumulated organic material that causes blockages.

APLICATIONS

We recommend using our TUBEFON drains unblocker whenever it is necessary to remove organic and inorganic remains causing scaling or blockages in the drains in wash basins, toilets, showers, baths, sinks, kitchens, etc.

PROPERTIES

- •Reacts chemically against organic wastes that accumulate in elbows and joints in pipes, such as soap, hair, toilet paper, cotton, bandages, cigarette stubs, etc.
- •**Highly concentrated product**, acts even against the most complex blockages.
- Quickly and radically attacks organic material of animal origin.
- Contains corrosion inhibitors.

INSTRUCTIONS OF USE

For an optimal result, follow these steps:

- •Leave the minimum amount of water in the drain.
- •Add the product to the drain slowly, always avoiding splashing.

Recommended mix: TOILETS..... litre. WASH BASINS, etc 100 - 300 cc.

- •Allow the product to act for at least 5 minutes then wash away very slowly with cold water.
- •After a few minutes, add plentiful water until it flows freely.
- •If the blockage is difficult, repeat the treatment as often as necessary.
- •For preventive treatments, use half the dose recommended above.

- 1 Kg. in box of 24 uds.
- 2 Kg. in box of 12 uds.
- 8 Kg. in box of 4 uds.







ABRITON

INSTANT BLOCKAGE REMOVER





Product composed by a mixture of solvents and additives, with lubricant properties, deoxidizing and inhibitors of corrosion that, with the high capacity of penetration, make of it a big help to any problem of block, clog or plugging.

APLICATIONS

- •Unblocking of screws and mechanic parts which are oxidized.
- •It helps to remove oxidized shafts, to liberate rings from corrosion machines, etc.
- •In gunsmith, naval industry, in ships and yacht, boats and watercrafts.
- •In general, in workshops of reparation of vehicles, service companies, shipyards, big collectivities, railways, etc.

PROPERTIES

- Dissolves effectively the dirt, mold and all types of residues.
- Acts by capillarity, what provides an **excellent power of penetration** getting the most hidden particles of oxidize.
- Very quickly action, loosen in a few seconds all types of nuts, bolts, locks, etc.
- Its contents in antioxidant, and inhibitors of corrosion, help to keep clean and lubricate the piece, delaying later obstructions and blocks.
- It can be applied on surfaces of rubber, eraser, wood or metal, without damaging the finished result. Surfaces of plastic require a check "in situ" due to the big variety of them existing on the market.

INSTRUCTIONS OF USE

It is used as it is supplied, in pure state, without solution.

The application will be done by brush, spraying or by immersion, leaving to pass 20-30 minutes before proceeding to loosen the piece.

- Aerosol in box of 12 uds.
- 5 L. in box of 4 uds.









SOLI-GAS

DIESEL ADDITIVE



APLICATIONS

- •Burners of pots, ovens, etc.
- •Shipyards, town halls, service stations, etc.
- •Bus companies, tractors, lorry, taxi companies, etc.

PROPERTIES

- Maintains in dispersion the impurities, avoiding the obstruction of the injector filters.
- Mix the rest of humidity which bother for a perfect combustion.
- Reduces the formation of sulfuric acid, avoiding in most parts the corrosion that this normally produces.
- Due to the previous points, the combustion is improved, getting an economy of the fuel around 3-5%.
- Reduces the emission of ashes and smokes.

INSTRUCTIONS OF USE

The dosage must be done preferably on empty deposits or with diesel oil.

Add the additive in the correct proportion each time that petrol fillings are done.

• First dosage: 2-3 liters for 1000 liters of diesel oil.

The first dosage must be the same during the two first weeks, in order to get that the facilities get the best result.

 Maintenance dosage: 1 liter of product for 1000 liter of diesel oil.

- 1 L. in box of 12 uds.
- 5 L. in box of 4 uds.











SOLI-FUEL FUEL-OIL ADDITIVE





Additive which neutralizes the harmful action of a series of strange materials which normally contains the fuel-oil, that when it rusts in presence of the atmospheric oxygen produce corrosions, obstructions and in general a combustion not much efficient.

APLICATIONS

Fuel-Oil systems in general, in which is wanted to get the following progress:

- Reduce of soot
- Avoid sedimentation
- Maintain the circuits cleaner
- •Increase the performance in the combustion
- Reduce the corrosion

PROPERTIES

1.STRANGE MATERIAL: WATER

Water is deposited on the button of the tank, reducing its capacity. Rusts and provokes the appearance of non-organic acids which produce problems of corrosion on the walls.

The addition of SOLI-FUEL, mixes and scatters the water stopping the formation of acids and reducing the oxidation in general.

2.STRANGE MATERIAL: SULFUR

The sulfuric acid produced in appearance of the oxygen and humidity of the environment attack to the walls by corro-

This effect occurs especially with low temperatures.

With the addition of SOLI-FUEL, it is reached quickly high temperatures, avoiding on this way the corrosion.

3.STRANGE MATERIAL: VANADIUM

The vanadium salts are deposited on the walls provocking

corrosion in high temperatures.

With the addition of SOLI-FUEL, is adjusted the excess of air, reducing the formation of vanadium oxides and also the vanadium corrosive salts.

4.STRANGE MATERIAL: HALOGENS (FLUORIDE, CHLO-RINE, ETC)

These elements react with water producing the hydrochloric, etc, which debilitate the metallic surfaces.

The addition of SOLI-FUEL, does that the anticorrosive agents that include in its formulation, protect the metallic parts of its attack.

5.STRANGE MATERIAL: ORGANIC MUDS

Formation of residues in the button which obstruct and complicates the composition.

With the additive of SOLI-FUEL, the organic particles are dissolved, it is cleaned the channeling and it is impeded that the volume of the tank decreases, increasing, the combustion of the performance.

INSTRUCTIONS OF USE

1.First dosage:

1 Lt of product for each 1000 Lt of Fuel-oil.

2.Maintenance dosage:

1 Lt of product for each 4000 Lt of Fuel-oil Normally is advisable to add the additive before the Fuel-oil.

Presentation

• 5 L. in box of 4 uds.











SINCAL

BOILER AND COOLING TOWER ANTI-SCALE PROTECTION





Composed of a complex of phosphates in dissolving, with powerful inhibitors of corrosion and antimicrobial, special for water treatments

APLICATIONS

We recommend its use in all types of refrigerant circuits or boiler facilities to prevent the salt embedded which can provoke big problems.

The factors which affect more in the behavior of the water are: pH, contains in oxygen, hardness and mineralization. Our preventive acts on all these factors, maintaining in the most appropriate levels for the perfect operation of the facilities.

PROPERTIES

- Catch the calcium ion, magnesium, etc, maintaining them in the solution and avoiding their incrustation in walls.
- If exists a previous incrustation, it acts on it, establishing a tendency on the metallic ions of the salt scab to pass throw the solution, reducing like this the incrustation.
- Acts on the pH, maintaining it in an alkaline interval which inhibites the cathode reaction of reduction of the oxygen.
- The action of the corrosion inhibitors **impeding the** wear of the facilities and its bad operation.
- The antimicrobial action reduces the risk of formation of substance of biological origin and inhibites the formation of mud.

INSTRUCTIONS OF USE

Before starting with the treatment, we recommend to clean the interior with our descaling and powerful cleaner **DESCAL A.E**, to ensure a well operation of the facilities.

First treatment:

We recommend a dosage of 4 liters of SINCAL for 1000 liters of water, such in refrigeration as in bolers.

Maintenance treatment: take a sample once the preventive is diluted, and compare it once a week with the water of the circuit, if the color has changed to a lighter one, means that the concentration of **SINCAL** is low and for this reason, it will be added more product until getting the color of the sample.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













VENTILEC

ELECTRICAL CIRCUIT ANTI-MOISTURE PROTECTION





Electrical circuit anti-moisture which is used for the protection of electric circuits for the corrosion, action of the atmospheric agents and derivations produced by parasitic currents, keeping the equipment in perfect working conditions, including after long inactivity periods.

APLICATIONS

It is used with success in the protection against humidity, dust, and rust of electric panels, telegraph, open engines, dynamos, cables, electric circuits, television, radio, telephones, etc.

INSTRUCTIONS OF USE

- Possesses a hydrophobic character, leaves completely bare the humidity introducing in all types of cracks including the most hidden parts, evicting the water and eliminating the derivations.
- •Possesses antioxidant agents which lubricate the pieces and cover them with a thin layer which will **absorb the dust**, eliminating the freights and working with an excellent anti-parasitic.
- •It does not attack to the paint, and it does not dissolve the varnish, being inert to a big amount of lac quers and elastics.
- •Improve the conductivity of the circuit, allowing to get a higher performance, with a lower maintenance.
- •Highly de-greasing, eliminates by dissolution the grease and dirt most embedded, protecting the electric equipment from the dust accumulated which damage the connections.

INSTRUCTIONS OF USE

- •It is used pure as it is in the container.
- •It is recommended to apply in cold. The application can be spraying, brushing, or by immersion of the piece we want to treat.

- Aerosol in box of 12 uds.
- 5 L. in box of 4 uds.









CLOROPOT CHLORINE FOR DRINKING WATER TREATMENT





Ideal product for the disinfection of water destined to the public consumption. It is constituted by an inorganic calcium salt, with a 65% of active chlorine, that possesses an excellent effectiveness as disinfectant against a wide range of bacterium, microorganisms, seaweed, virus, etc.

APLICATIONS

Its use lead to: water-treatment plants, transport of drinking water, cleaning contracts and disinfection of cistern tanks in hotels, shipping companies, etc.

Its use is essential in the prevention of infections and propagation of epidemic caused by the failure in the supply of drinking water, floods, damages in water treatment plants or when the quality of the water is not appropriate.

PROPERTIES

Its disinfection action is based in two points:

1. Acts by contact against the bacterium and microorganisms which contaminate the water, as consequence of its passage through dam and conductions before getting the water treatment plant or because of the atmospheric agents.

2. Acts rusting the organic material in the water, which is used as nutrient by the microorganisms. Our product eliminates the bad odors, turbidity, and color changes, getting as consequence a clean and crystalline water.

INSTRUCTIONS OF USE

Normal dosage:

20gr/m3 of water to treat.

Maximum dosage recommended:

30gr/m3 of water to treat.

• In facilities of drinking water treatment plants, add the necessary quantity of product in the chlorination pond after the flocculation, decantation, filtration and adjustment treatment of the pH of the water.

- In disinfection of water tender in hotels and communities, add the product after the cleaning, being enough once each 6-12 months.
- In municipalities without facilities of water treatment plants, add the product in the chlorination pond diary.
- In tanks or containers of drinking water in ships, add the product after the cleaning of this, each time that the deposit is refilled.





RETROC-MAX

CONCENTRATED WATER



RETROC-MAX surrent specials in the same special in the same specials in the same special in the

Highly effective water repellent for surfaces with problems caused by damp.

Highly concentrated water repellent materials that give the product a high coverage.

APLICATIONS

Recommended for use as a water repellent on general building materials such as cement, plaster, baked clay, natural stone, artificial stone, tiles, bricks, etc.

 To protect constructions against all problems caused by damp and air pollution.

PROPERTIES

- It very economical because of its great coverage, since it can be applied highly diluted in water.
- Has a high degree of penetration in the surface, creating a high quality water repellent barrier.
- Conserves the material's porosity, allowing it to breathe, and avoiding the pressure differences caused by perforations in the surface treatment.
- Because it repels damp, it prevents the appearance of fungus and blooming.
- The treated surfaces can be treated perfectly.
- Prevents chemical damage caused by acid rain in towns or industrial areas.
- Its heat insulation coefficient is unaffected by humidity.

INSTRUCTIONS OF USE

- •Used diluted in 7-10% water to waterproof both vertical and horizontal surfaces.
- •To waterproof mortar, add undiluted to the water in the mix in the proportion of 4% by weight of cement.

Once the wall is ready, apply as in the above case.

- •To waterproof plaster, add to the water in the mix in the proportion of 8% of the weight of the plaster.
- Can be applied by roller, brush or spray gun, spreading the product until the surface is totally saturated with it.
- •When the surface is very porous, a second coat should be applied before the first is completely dry.
- •Beading (water repelling) will start to be seen once the coat is dry, although it will only reach full effectiveness 48 hours after treating the surface.

COVERAGE

- •The covering power of our RETROC-MAX water repellent will depend on the state of the surface and the degree of waterproofing required.
- •As a guide, once diluted, 30 to 40 m2 can be treated per litre.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.















REVICEM

WATERPROOFING FOR DAMP AND WET WALLS



Waterproofing for damp walls and concrete surfaces and masonry where great resistance to damp and water is required.

APLICATIONS

Waterproofing for all types of concrete surfaces.

- •Repairs to surfaces exposed to water in cisterns, water tanks, swimming pools, water pipes, etc.
- Protection from rainwater in tunnels, basements, lift shafts, garages, etc, preventing water seepages.

PROPERTIES

- •Waterproofs to retain and prevent pressure, allowing it to support water loads even in completely wet surfaces such as swimming pools, cisterns, tanks, etc.
- Adheres perfectly to clean, porous and damp surfaces.
- •Protects concrete and masonry from constant damp, seepages, damp surfaces etc, providing impermeable substrates of great resistance and durability.
- •Comprises a mix of special cements and additives that give it very specific properties.

- •Allows the concrete to transpire, without yellowing and provides washable surfaces.
- •Once set it does not react and is thus **compatible with drinking water.**

COVERAGE

As a surface treatment applied by brush: 1-1.5 kg./m2 with 1 mm thickness.

With the consistency of mortar applied with wool: 2- 3 kg./m2 with 2 mm thickness.

INSTRUCTIONS OF USE

- •Before applying REVICEM, the surface must be cleaned of all types of dirt, blooming, fungus, remains of other treatments, etc, to provide a firm adherent base.
- With water courses, seepages, cracks, faults in pipes, etc, repair with REVICEM-P
- •Finally, the base must be moistened to saturation while avoiding puddles.
- •Mix REVICEM with water to the required consistency, depending on whether it is to be applied by brush or with wool.
- •Application with brush: Mix 100 parts of REVICEM with 30-35 of water and apply as though it were paint using a stiff brush. Apply second coat 24 hours later, brushing crosswise to the first coat.
- •Application with wool: Mix 100 parts of REVICEM with 20-25 of water to give the consistency of putty and apply to a thickness no greater than 3 mm. If the waterproofing is to be subjected to constant.

Presentation

5 Kg. in box of 4 uds.





PAVON

TREATMENT FOR RUSTY IRON (RUST TRANSFORMER)







This product is specially designed for treating rusty iron surfaces. When applied to the rusty metal it causes a chemical reaction that converts the iron oxide into a black/blue insoluble organic compound that protects the metal from further rusting, while forming a firm base for paint or other finishes.

APLICATIONS

PAVON covers a wide range of applications. As a rust transformer it can be used in all industries that use or work with iron, such as, for example, ship building, the automobile industry, maintenance, building (for treating fences, windows, tools, etc), do-it-yourself, etc.

PROPERTIES

- •Does not require extensive sandpapering, although the best results are obtained by removing the remains of paint, scale, residues and greases so that it can react directly with the rust.
- •Surfaces are left ready for painting or lacquering. Painting can be avoided by applying a second coat of product.
- Does not freeze.
- •Does not contain inflammable or volatile solvents.
- •**High coverage:** 15 20 m2/l depending on the temperature.

INSTRUCTIONS OF USE

"STIR BEFORE USE"

Apply with brush, roller or spray. Should not be diluted.

Surfaces with remains of paint and old rust: Scrape the surface to facilitate penetration by the product and apply a first coat.

Surfaces impregnated with calamines: Sand blast for a perfect application and apply one coat of product.

Surfaces with little rust: Brush off the loose dust and apply one coat of product.

- •Approximate drying time: 2 hours. Do not apply paint or a second coat until this time has elapsed.
- Clean tools with water immediately after use.

- 1L in box of 12 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.



DISOLMAN

INDUSTRIAL DEGREASING HAND-WASH



Product especially elaborated for the hand washing in people that for their work, they have them exposed to big quantities of grease, oils, inks, and dirt in general.

APLICATIONS

Its use is especially recommended in workshops, plumbing shops, printing houses, shipyards, factories, ships, mines, railways, and in general in all those activities, in which is required a deep cleaning action after having realized a work with oils and greases of engines.

PROPERTIES

- Pleasant fruity smell.
- Posses **a big degreasing power** and emulsifier in general.
- Contains moisturizing and softening agents which avoid drying out the skin.
- Contains antibacterial additives to avoid that the small wounds done during the work time become infected.
- Its composition consists in a complex and completely balanced mixture of organic deodorized solvents, anionic and no-ionic surfactants and stabilizers, softeners, and antibacterial agents.

INSTRUCTIONS OF USE

- It is recommended not to wet the hands before applying the product, considering that this could trickle and its action would be reduced.
- Put a small quantity of product in the palm of the hand, and after being homogeneous dispersed, rub until you see that all the dirt has been dissolved.
- Next, rinse with water until the total elimination of the greases.

It can be applied with a special dispenser which we will provide in case it is demanded, being necessary to dilute it in water for viscosity fitting, depending on model to use.

- 5 Kg. in box of 4 uds.
- 10 Kg. in box of 2 uds.







RUSTISAN WET EFFECT TREATMENT FOR RUSTIC AND CLAY PA

FOR RUSTIC AND CLAY PAVING





Creates and maintains a wet effect on paving of clay, terracotta, Catalan tiles, and in general, ceramics with a porous finish, moistening them and protecting them against damp and daily use..

APLICATIONS

This product is recommended for treating clay, terracotta and ceramic paving with porous finishes to protect them against stains from damp and daily use.

Its regular use creates a wet effect, giving floors that recently-cleaned look and creating a welcoming air with a very agreeable fresh smell.

PROPERTIES

- Has a balanced and perfect water repelling action, without leaving traces when applied.
- •High penetrating power, sealing the pores in clay and ceramics generally, protecting floors from damp and deterioration through daily use.
- Preserves the appearance of the clay, highlights its beauty and creates a welcoming air with a very agreeable fresh smell.
- •Its regular use keeps the new look of clay floors and delays ageing.

INSTRUCTIONS OF USE

SHOCK TREATMENT

- 1. Clean and de-scale with our DESCAL special scale remover for clay, thoroughly rinse and allow to dry completely.
- 2. Dilute 50% in water and apply a first coat with a mop or roller, previously moistened in water.
- 3. Apply the second coat with undiluted product. The matt wet effect will appear immediately.

For a satin finish, apply a third coat of undiluted product, pressing firmly while applying.

Dries immediately; it can be walked on after 15 minutes, although it is preferable to wait for 1- 2 hours.

MAINTENANCE

To maintain the appearance obtained with the shock treatment, add 15 to 20 cc. to each bucket of water and clean the floor as usual.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.











DESCAL

SCALE REMOVER, ENHANCED CLEANER AND RUST REMOVER





Scale remover and cleaner for all types of insoluble salts such as calcium sulphate, calcium carbonate, magnesium hydroxide, insoluble silicates, etc, converting them into water-soluble compounds.

APLICATIONS

Removes cement residues, lime deposits and dirt stains on cement floors.

- •Scale remover for bricks, floors and tiles, drains, down pipes, industrial dishwashers, washing machines, fur in WCs, etc.
- Rust remover for metals.
- •Cleaner for lime scales, algae, blooming, etc.

PROPERTIES

- •Dissolves cement residues and lime deposits.
- •Contains corrosion inhibitors that cancel the effects of acids on metals.

Contains wetting agents that reduce surface tension so that the product **reaches even the most hidden areas.**

- Acts as a rust remover in metals, allowing later treatment.
- •Removes algae, blooming, mosses and scaling in swimming pools, ponds, fountains and boats.
- •Cleans greases and oils from cement floors.

INSTRUCTIONS OF USE

DE-SCALING OF DRAINS, DISHWASHERS AND WASHING MACHINES

Dilute 1 part of product for each 2 parts of water.

In drains, pour in 100 cc. and repeat the operation three times at 10-minute intervals.

In dishwashers and washing machines, apply 250 cc. in the washing water and allow the washing and rinsing processes to be carried out. Repeat the operation if necessary. To remove fur in the WC, pour in 100 cc. and scrub with a brush.

DE-SCALING IN BUILDING WORK

To remove remains of concrete and cement from floors and tiles, use I part of product for 2-IO of water, depending on the degree of scaling.

CLEANING SWIMMING POOLS, FOUNTAINS, BOATS, ETC: As above.

RUST REMOVER FOR CLEANING METALS

Dilute 1 part of product in 5 of water. Apply to the metal with a brush. Rinse and dry and protect with our REVINOIR

Anti-rust varnish or with our PAVON rust transformer t prevent further rusting.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.















DESCAL-25

DE-SCALER



Product formulated in base to a complex and equilibrated combination of inorganic acids, surfactants and powerful inhibitors of corrosion, especially studied for the total elimination of products derived from limestone or clayey in general.

APLICATIONS

- •Descaling and cleaning of mineral substratum in: tiles, bricks, cement floors, pools, public founts, baths, wastepipes, etc.
- Metallic substratum: tools, construction machinery, public works, etc.

PROPERTIES

- •The surfactants that exist in its formulation, diminishing the superficial tension improving the **reaction velocity**.
- •The existence of inhibitors of corrosion in its chemical composition, make this product recommendable for the cleaning of metallic tools, facilitating the
- elimination of spots caused by the rust of the iron and by the rust of the aluminum.
- •Dissolves cement residues and calcareous deposits.

INSTRUCTIONS OF USE

- •Depending on the application we want to do, and the state of the substratum to treat, it can be used pure or diluted until in 12 parts of water.
- •It can be applied by brush or spray.
- •It is recommended to do trials of dilution to find the optimum for each situation.
- •Once it is applied, leave to act some minutes, and after that rinse with abundant water.
- •When the product is applied on metallic substratum, it is necessary to rinse with abundant water and later dry it to prevent later oxidations.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.





REVIMCA

WATERPROOFING ACRYLIC RUBBER SURFACE TREATMENT






Water-based waterproofer whose main component is a synthetic acrylic styrene copolymer. Once dry, it forms a layer that sticks strongly to the surface and is completely elastic. It penetrates deeply into cracks and hollows and follows expansion and contraction movements without splitting.

APLICATIONS

Revimca is the ideal product for waterproofing terraces, flat roofs, roofs, etc, in private houses, apartment blocks, hotel maintenance services, construction companies, etc.



PROPERTIES

- Total waterproofing.
- Great adherence and fitting to the supporting base, penetrating cracks and hollows.
- Maximum resistance to traction.
- Chemical stability.
- Great resistance: to rubbing and wear, to ultraviolet radiation (does not discolour or spoil).

Has the following advantages compared to other application instructions:

1. Low application cost.

- **2. Quick and simple application**, without construction work or expensive or sophisticated tools.
- 3. Improves the appearance of surface finishes.
- **4.** Is compatible with other waterproofing instructionss, so it can be used to repair old waterproofing.
- 5. The treated surface can be walked on.
- **6.** Can be applied before new flooring is installed.
- **7.** Tools are cleaned simply with water.
- **8.** Reduces fire risk since it has no solvents or tars, making it self-extinguishing.

INSTRUCTIONS OF USE

SURFACE PREPARATION

Repair all hollows, cracks, etc in the surface to be waterproofed. Clean up dirt and leaves and wait until completely dry.

PRIMING

Apply a first coat of waterproofing diluted with 20-25% water. Ensure that this priming penetrates all hollows and cracks in the surface. Apply with a brush or roller.

PLACING GLASS FIBRE

Once the primer coat is dry to the tough, place the glass fibre cloth, gluing it to the primer with a coat of pure revimca.

FINISH

Once the second coat has dried, apply one or two coats of pure revimca to achieve optimal results.

COVERAGE

1.5 - 2 kg. of product per m2

Presentation

- 1 Kg. in box of 16 uds.
- 5 Kg. in box of 4 uds.









Colores:

Ref. C1010 - WHITW Ref. C1011 - OXIDE RED Ref. C1012 - GREEN Ref. C1013 - BEIG Ref. C1014 - GREY Ref. C1080 - ROOF RED

REVI-MOSS

ANTI-MOSS TREATMENT





Cationic formula with persistent cleaning action and wide range of action against algae, germs and microorganisms.

APLICATIONS

 Recommended for removing all types of algae, fungus, moss, mildew, etc, on the surfaces of floors in terraces, gardens, walls, etc.



PROPERTIES

- Product comprising a solution of quaternary ammonium salts with excellent chemical stability.
- •Its great power as a wetting agent allows it to penetrate places that others can't reach will providing a residual action that guarantees the total elimination of micro-organisms.
- •Because of its cationic nature, it has a great affinity for bacteria, acting on GRAM+ and GRAM germs, even on layers of staphylococcus aureus.
- •Soluble in any proportion of water and its effectiveness is not affected by the water's hardness.

INSTRUCTIONS OF USE

- •The mix depends on the state of the surface and the nature of the micro-organisms: algae, fungus, moss or mildew.
- •As a guide, dilution may range from 1 part of product in 10 of water to 1 part of product in 20 of water, always depending on the age and type of the micro-organisms.
- Once diluted, spray the surface, allow it to act for a few minutes and rinse away with water. Allow the

surface to dry completely before applying any other type of treatment to it.

•If any micro-organism re-appears once the surface is dry, this is because its roots are deeper and more numerous than thought, in which case a new, stronger application is recommended.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.













BIO-REV

BIOLOGICAL TREATMENT FOR SEPTIC TANKS



BIO-REV

URANI RAY OF THE PROPERTY OF THE PROP

Based on enzymes (microorganisms and nutrients). Effective for unblocking pipes, drains, fat traps, septic tanks, etc.

APLICATIONS

- •Used to treat septic tanks, cesspools, wastewater holding tanks, portable toilets, maintenance of industrial facilities, abattoirs, cutting plants, meat-processing plants, etc.
- •Allows dumping parameters to be controlled for wastewater treatment, purification plants, etc.
- Enables odours to be reduced at poultry and pig farms, stables, etc.
- •Very useful product for industrialscale kitchens, restaurants, catering operations, hotels, military camps, etc.

PROPERTIES

- •Acts quickly and selectively against organic matter.
- ●Reduces the surface solids content by 77% and up to 40% of solids deposited on the bottom.
- •Acts across a wide range of pH values, between 5.0 and 9.0.
- Ongoing use of this product allows chemical oxygen demand (COD) values and solids in suspension to be reduced, making it possible to lower the frequency with which septic tanks need to be
- •Ongoing use of the product enables the production of methane and other gases to be kept below 0.1%, thereby eliminating unpleasant odours.

YIELD

The yield will vary depending on the task for which the product is being used.

INSTRUCTIONS OF USE

Use by dissolving a suitable amount of the product in water, depending on the amount of pollutant to be treated.

YIELD PER APPLICATION		
APPLICATION	TREATMENT	MAINTENANCE
Elimination of unpleasant odours on farms, in warehouses, etc.	200 g/10L water/10 T animal weightl	-
Control of organic matter at abattoirs, cutting plants, etc	800 g/ m3 of water, every 3 days	100 g/ m3 per day
Control of smells from compost facilities, poultry farms etc.	10 g/ 1000 birds, weekly	-
Cesspool treatment	50 g/ m3 water	25 g/m3 water
Wastewater treatment plants	1 Kg./ 5000 m³	500 g/ 5000 m3 , weekly
Digesters, activated-sludge ponds, etc	10 g/ m3 water	10 gr./ m3 water, weekly
Cleaning pipes, drains, fat traps, etc.	100 g/ 500 L water	50 g/ 500 L water, weekly
Restaurants, catering	50 g/ 500 meals per day	-
Treatment of household waste	400 g/home	100 g/home weekly
Cleaning pipes, portable toilets, septic tanks	500 g/ m3 water	50 g/toilet

- 1/2 Kg. in box of 12 uds.
- 1 Kg. in box of 12 uds.
- 5 Kg. in box of 4 uds.









REVI-PACK EFFERVESCENT BIOLOGICAL TREATMENT TABLETS





Biological activator for waste water treatment made of the best mixture of nonpathogenic microorganisms, enzymes and aroma.

APLICATIONS

Used in the treatment and maintenance of septic tanks, cesspools, sanitary facilities, wastewater collectors, community sewage water, large groups, etc..

- Very useful for facility maintenance companies, hotels, residences, military camps, etc.
- High-performance product, no special care required.

PROPERTIES

- •Quick, effective action for organic matter, garbage, wastewater, etc.
- •lts balanced composition of microorganisms and enzymes ensures quick, long-lasting action.
- Prevents obstruction, stoppage and foul odours from pipes, drains, toilets, etc.
- Maintains the biological balance in the facilities they are used in.

- •Handling is nonhazardous as it contains no toxic or harmful substances.
- •Natural, caustic-free, environmentally-friendly product.
- Easy-dose tablets come in individual 12-tablet packs. Packages contain a 6-month supply.

INSTRUCTIONS OF USE

Use from the package as it comes. Open the bag and add the table directly to the toilet. Wait until it dissolves in the water and then flush.

The tablet can also be dissolved in a bucket of water and then poured directly down the drain, into cesspool or septic tank.

Repeat treatment every fortnight dissolving another tablet.

Presentation

• 240 grames in box of 8 uds.



REVITOP

ANTISKID FOR ENAMELLED SURFACES





This mixture of inorganic acids, surfactants and rustproofers, is suitable for use in contact with enameled surfaces, tiles, porcelain, etc.

APLICATIONS

Used as an antiskid treatment on grestile floors, glazed ceramics, enamelled surfaces, marble, granite, natural stone, etc.

- •Provides antiskid surfaces for bathtubs, shower stalls, gres tiles, etc.
- •Indispensable for assisted-living facilities, senior-citizen care facilities, large groups, children's camps, communities, hotels, sports facilities, etc.
- •Very useful for maintenance companies, plumbing contractors, etc.

PROPERTIES

- •A chemical reaction acts on the surface it is applied to creating micropores that **prevent skidding when wet**.
- ●The treatment leaves no product residue on the surface.
- •Increases the friction coefficient between the surface and shoes or feet, avoiding skidding and slipping on wet surfaces.
- •Quick and easy treatment, with no need for maintenance, except for wear and tear from traffic.
- Acts quickly, allowing the treated surface to be put into use immediately after removing excess product.
- •Avoids the need for rugs, anti-skid strips, etc., in bathtubs and porcelain surfaces, assisting in the conservation of pieces treated for fungus.
- Provides an invisible finish, not changing the look or colour of the treated surfaces.

INSTRUCTIONS OF USE

Clean the surface to be treated, removing dust, grease and dirt before applying the product. Rinse with water and dry.

Apply as it comes from the container, as a spray or with a sponge over the entire surface. Let cure for 5- 30 minutes and then rinse well with water.

Curing times vary depending on the material treated. On tiles, let set 5-7 minutes. On polished marble curing takes from 4 to 6 minutes. On granite let set for 20-25 minutes. If necessary leave on longer depending on results.

For bathtubs, shower stalls, etc., put the plug in the train. Apply and let set for 8-10 minutes, and then rinse well with water.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.



REVIGRES

ANTI-SLIP TREATMENT FOR STONEWARE AND PAINTED SURFACES





Based on a mixture of inorganic acids, dispersal agents, viscosity regulators and corrosion inhibitors, suitable for use on all types of stoneware and painted surfaces, both horizontal and vertical.

APLICATIONS

Used to give an anti-slip treatment for all types of stoneware and painted surfaces

- •Of essential use in sports centres, hotel swimming pools, gymnasiums, salt water treatment centres, water therapy centres, etc.
- •Meets the specifications of the technical building code, section SU 1, class 3. It is especially recommended for damp indoor and outdoor surfaces, areas in which users are barefoot and the bottoms of swimming pools less than 1.5 m deep.

PROPERTIES

- •Acts by chemical reaction on the surface to which it is applied, creating micro-pores that prevent slipping on damp surfaces.
- •The treatment **leaves no remains** of the product on the surface.
- •Increases the coefficient of friction between the surface and footwear or feet, preventing slipping on damp surfaces.
- •Simple and quick treatment, requiring no further maintenance, except where constant use has caused abrasion.
- Acts quickly, allowing treated surfaces to be used

immediately after all remains of the product have been removed.

- Contains viscosity regulator additives that allow the product to be applied on horizontal and vertical surfaces.
- •On vertical surfaces, increases the contact time with the surface, allowing large areas to be treated without drips.
- •Provides invisible finishes, without changing the appearance or colour of the treated surfaces.

INSTRUCTIONS OF USE

Before applying the product, clean the surface of dust, grease and dirt. Wash with water and dry.

Apply as described on the packaging, with a spray or sponge, soaking the surface well. Allow to act on stoneware for at least 45 minutes then wash with

plentiful water.

As a rough guide, the performance is 2.5 to 3 m2/litre of product. The product should be spread well over

the entire surface and retouched if necessary during the drying time.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.













REVIPUL

STAINLESS-STEEL SURFACE POLISH





It is made by a mixture of humectants, sequestrants, abrasives, brighteners and viscosity regulators.

APLICATIONS

Eliminates spots caused by grease, dirt, alkaline degreaser in surfaces of stainless steel, allowing to recover the aspect of the original polished.

- Very useful in metal workshops, companies of transformation of stainless steel, industrial kitchens, cleaning of extractors in industrial kitchens, hotels, communities, cleaning companies, etc.
- Product with a high performance which allows the restoration of the bright in very used surfaces, attacked or very used.

PROPERTIES

- Contains surfactants which allow to penetrate and to extract the spot from the surface where it is applied.
- Contains fineness abrasive, hardness and granulometry suitable to prevent marks on the treated surface.
- Its contain in sequestrant and brightener agents allow the eliminations of oxide spots, stainless steel surfaces, glass ceramic hob, etc.
- Allows the elimination of spots in surfaces that in another way could not be eliminated.
- Restores the bright in metallic surfaces, stainless steel, etc, allowing to recover its original aspect.

INSTRUCTIONS OF USE

It is applied as originally in the container, extending a small quantity of product on the spot to eliminate. Leaves it to act during a few seconds and after that rub with a clean mop until the spot is eliminated.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.







ALIREV

NON-TOXIC COLORLESS GREASE FOR THE FOOD INDUSTRY



Colorless synthetic grease, slightly stringy, non-toxic, specific for the lubrication of machineries, mobile parts, gears, etc, in the food Industry.

APLICATIONS

Allows the maintenance of machinery, axle boxes and in general in all kind of gear systems that requires a long duration.

- •It is used in the lubrication of machineries of the meet industry, bakeries, milk factories, soft drinks companies, canning industry, etc.
- •Very useful in all types of applications that require a grease with big adherence, colorless, that requires non-toxic properties.

PROPERTIES

- Excellent behavior in low and high temperatures.
- Provides a lubricated layer of greases benefits, resistant to the humidity, contact with water, acids and alkalis.
- Protects from the corrosion and oxidation.
- •Facilitates the slipping between the mobile pieces, reducing the coefficient of friction and wearing out.
- •It can be in indirect contact with food during its elaboration (Rule HI)
- •Product packing in aerosol with propellent **nopolluting of the ozone layer.**

INSTRUCTIONS OF USE

Shake it before use it.

Spraying directly on the surface to treat, 20cm far from it, in shorts bursts. Once the application is finished invert the aerosol and do several sprayers to clean the valve.

Presentation

Aerosol 400 cc in box of 12 uds.



ODOREV

ECO-SOLVENT ODOUR REMOVER





Specific product for cleaning, fat removal and elimination of unpleasant odours in areas near rubbish containers and tips, pipes, fat traps, processing floors and areas, compost heaps, wastewater, or for use in the food industry.

APLICATIONS

Cleaning and fat removal of floors and surfaces at industrial abattoirs, animal-sacrifice areas, waste stores, and in general anywhere related to the food industry where unpleasant odours need to be eliminated.

- •Particularly useful for waste-collection firms to eliminate unpleasant odours at bin stores or for cleaning and deodorising used containers.
- •Eliminates unpleasant smells at farmyards, animal transit areas, stables, pens, etc.

PROPERTIES

- •Based on natural terpenic derivatives mixed with selected emulsifiers.
- •Provides water-stable emulsions that highly effective at removing fats and eliminating odours.
- Facilitates the removal of fats and dirt simply by rinsing with a water jet.
- Contains no halogenated aromatic solvents.
- •Eliminates bad odours near rubbish tips, wastewater, etc., and replacing them with a long-lasting pleasant smell.

INSTRUCTIONS OF USE

Use diluted in water as an emulsion. The exact proportion will depend on the amount of dirt and intensity of the odours to be eliminated. Can be applied by drip dosage, sparring or by adding the emulsion directly to the area to be treated.

As a standard dose, use 1 part product per 10-25 parts water. In areas where fat is to be eliminated, dilute to 1% in water

Leave for a few minutes and then rub with a cloth or stiff brush, or rinse with a water jet.

- 5 L. in box of 4 uds.
- 10 L. in box of 2 uds.













BROCHE-LEG

DESINFECTANT FOR THE TREATMENT OF THE LEGIONELLA





Desinfectant for the treatment of the Legionella. Use in refrigeration towers and evaporative condensers. Exclusively used by personnel specialized.

APLICATIONS

It is used as a disinfectant in the treatment of the entering water in refrigeration towers, evaporative condensers and equipment of air-conditioned for the prevention of the development of Legionella pneumaphila.

•Indispensable to meet the Hygienic-Sanitary criteria for the prevention and control of the legionellosis. (RD 909/2001 and RD 865/2003)

PROPERTIES

- •Specific disinfectant for the control of Legionella based in derivatives of quaternary ammonium of modified structure and selected chains.
- •Acts quickly and with little concentrations, at parts-per million (ppm) levels.
- •Compatible with hard waters and the presence of organic material without losing efficiency, effective in a big range of pH and temperature.
- Acts in the microorganisms which cause breat-

hing problems, allowing the prevention of infections by Legionella.

- •Its big moistening power allows the elimination of seaweed circuits, mud and biofilm, which produce loss of performance in the hot transfer of the refrigeration in industrial equipments.
- Easy to apply, soluble in water with any quantity.
- •Product proven in an independent laboratory, meeting the regulation prEN 13623 (chemical disinfectant and antiseptics. Bactericidal activity of products against Legionella pneumaphila) to 24 hours.

INSTRUCTIONS OF USE

Dilution in the water of the circuit by a dispenser bomb. **First time of use:** 2L of product for each m3 of water to treat, keeping it in recirculation during at least 1 hour. Maintenance: 2L for each m3 of water.

Obey the laboratory test by the regulation prEN 13623 (Chemical disinfectant and antiseptics. Bactericidal activity of products against Legionella pneumaphila) to 24 hours. Incompatible with organic material, detergent having anions in its composition, ammoniacal and hypochlorite derivatives.

Incompatible with chromium, lead, aluminum, tin, zinc and their alloy (bronze, brass, etc).

This product has a kit of analysis of quaternary ammonium

LAMOTTE Kit code 7057 (It is applied apart).

Neutralizing: sodium lauryl sulfate (Ipart of sodium lauryl sulfate for each part of didecyl dimethyl ammonium chloride)

It is used measuring out the necessary quantity of product by a dispenser bomb in the pond of the refrigeration tower. In evaporative condensers, machines of air-conditioner, fans, etc, add the required quantity of product in the condensation tray of the water.

or the cleaning and disinfection of the filters of the air-conditioner machines in a dilution of 20mlof product for each 10litres of water, keeping a time of contact of minimum lhour. After that rinse with water and assemble the filters.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.













SILFO

CLEANER AND AIR FRESHENER



SILFO

General cleaner in base of bioalcohol, quick dry. Cleans and perfumes at the same time, any type of floors, glazes, plastics, etc.

APLICATIONS

It is very useful in the cleaning of floors, bathrooms and tiles, and varied surfaces in facilities as: catering, schools, cinemas, big storages and in all those places where a deep cleaning with a pleasant and permanent aroma is required.

PROPERTIES

- Possesses a highly cleaning power.
- •Provides to the places where it is applied, a pleasant and permanent odour.
- •lts hydro-alcoholic composition, provides **a quick dry**.
- •Low foaming composition, so that it is not necessary the clarification.
- •lt can be used in marble floors and in glazed surfaces.
- •Meets the regulation about biodegradability.

INSTRUCTIONS OF USE

- •**Big places:** dilute approximately 50 cc. of product per 5liters of water, and proceed to clean normally.
- **Difficult spots**: damp a clean mop with the product in pure state, and after that, apply on the spot.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.















SUDEL

CLEANER FOR DELICATE FLOORS





New product formulated specially for the cleaning and maintenance of delicate floors of frequent use.

APLICATIONS

Essential in the cleaning of marble and glass floors to keep its sheen without using other products of difficult application.

We recommend its use in: hotels, storages, restaurants, hospitals, schools, cinemas, offices, etc.

PROPERTIES

- •Intense cleaning power without abrasion.
- Minimum contain in foam, so that it eliminates the rinse.
- •Provides a quick dry.

- •Special to use in marble floors and glass surfaces.
- •Provides a **pleasant aroma** in the places where it is applied.
- •Enhances the sheen in the treated surface.

INSTRUCTIONS OF USE

Use it diluted in water. The dilution will depend on the state of dirt of the surface to treat.

- •Surfaces with little dirt: dilute 10 cc of product per 5liters of water, and proceed to clean.
- •Surfaces very dirty: dilute 25-30 cc of product per 5liters and proceed to clean.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













DETERSUL FLOOR-CLEANER DETERGENT





Product formulated specially for the automatic cleaning of floors. Its main characteristics are: high degreasing power, near-absence of foam and pleasant aroma.

APLICATIONS

We recommend its use to clean floors of big surfaces, where it is recommended to use automatic machines because of its size, with detergent of high degreasing power.

- Hotels, restaurants.
- Big communities.
- Bus stations or railroads, airports...etc.
- Hospitals, clinics, residential.
- Shopping centres, etc.

PROPERTIES

- •Eliminates all type of dirt, even the ones originated by mineral greases or oils.
- •As it does not produce foam, it eliminates the rinse work, assuming a economy in time very considerate.
- •Ideal formulation for its application with cleaning machines.
- •Its content in surfactants is governed by the strict regulation of biodegradability.

INSTRUCTIONS OF USE

The dosage to use will depend on the grade of dirt that the surface to treat has.

•As medium and illustrative dosage, we recommend to use a 0,5% in water for the surfaces with a normal dirt, until a 3% of the surfaces very dirty.

•To do a dilution in the machine, follow the instructions of the manufacturer of the machine.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













ANETO-I

MARBLE SHEEN AND PROTECTOR



APLICATIONS

•Excellent protector and polishing of marble floors.



Special concentrated for the shining of floors providing a sheen layer and intensifying its colour.



PROPERTIES

- •Polish in only one application, without the necessity of using a machine.
- •Protects the marble and stone in general, from spots, dirt and scratches.
- •It is resistant to the alcohol.
- •Possesses excellent characteristics of hardness and sheen, and also facilitates the elimination.

INSTRUCTIONS OF USE

IBefore its application, a deep cleaning of the surface to treat will be done; do not use a sparkling product. If the surface contains rests of lime or cement, use our lime and cement eliminator "QUISOL".

- •Leave to dry the floor completely. If there is heater by the floor, it must be switch off at least 12 hours before applying the product.
- •Dilute the product in water 1:1. Introduce the half of a cup of diluted product in the surface to treat (4 m2 per each half cup). Do not rub or polish. To get an optimal result, apply it using a mop, protected with a plastic bag, covering around the damp mop which does not leave fluff.

- •After 30 minutes, the surface will be dried. For a perfect shined, it is recommended to apply a second coat perpendicular to the first one.
- •Do not give any treatment to the surface until 2 days after its polished. Although, if you want, a mop can be passed to clean the dust.
- •For a regular maintenance, use our "CLEANER-MARBLE SHEEN (DIARY USE): **ANETTO II**" IAn electric polisher of high velocity can be used, 3 days later.

PERFORMANCE

Depending on porosity, approximately will be: 60-80 per litre of product.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













ANETO-II

CLEANER-MARBLE SHEEN (DIARY USE)





Product formulated for the maintaining of polished marble floors and non-polished floors.

APLICATIONS

- Ideal product for maintaining the sheen of polished floors.
- Enhances the sheen in non-polished floors.
- If the floor has been treated before with our manual shining "ANETO I", the surface will keep the sheen during more time.

PROPERTIES

- Clean and shine in only one application.
- Using it in the water of the mop, maintains during more time the polishing.
- Has a big performance, only is needed 20 to 25 cc of product per bucket of water (8liters).
- Possesses a high wetting power.
- Dries quickly.

INSTRUCTIONS OF USE

- •Sweeps well with brush or mop the surface to treat.
- •Add 20 to 25 cc of product to the water of the bucket and proceed to clean, with a very wrung mop.
- •It is convenient to maintain the water of the mop always clean, if not, we will leave the dirt on the floor.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.



REBRILL

FLOOR SHEEN, FOR MOPS AND DUSTERS





REBRILL REPRINCE REPRINC

Product specially formulated for the cleaning of floors and different surfaces in dry, spraying directly on the mop or duster. Especially recommended for the conservation of all types of glazed floors.

APLICATIONS

We recommend its use for the cleaning and maintenance of floors in big surfaces as:

- Hotels, restaurants, airports, marine stations…etc.
- Wood floors, formica floors, metallic, etc.
- Plastic surfaces, vinyl, etc.

PROPERTIES

- Attract the dust, removing it from the floor and avoiding the back of it to the floor, thanks to the antistatic power that it possesses.
- •Provides to the treated surface a thin layer which protects from the dampness and aggressive agents.
- ●Clean and sheen in only one application.
- •Cleaning very quickly as there is not to wait to dry.
- •It is applicable in floors and also in a wide variety of surfaces.

INSTRUCTIONS OF USE

- •Spray the mop or duster with our shining with a distance of 20 cm approximately.
- •Leave a few seconds and make it to slide in the surface to clean and sheen.

In only one step an excellent and long-lasting sheen is got.

- 1 Kg. in box of 12 uds.
- 5 Kg. in box of 4 uds.
- 10 Kg. in box of 2 uds.









STARK

FLOOR WAX



APLICATIONS

We recommend its use in all types of tiles roadways, terrazzo, etc of: hospitals, schools, banks, official organisms, congress palaces, restaurants, hotels, supermarkets, etc.



Concentrated emulsion of selected waxes, additives with polymer of polyethylene and moisturizing agents which give as result a product of high durability which provides to the treated floors a big resistance to the wearing away and a great sheen.



PROPERTIES

- Product especially elaborated for the conservation and the maintenance in perfect state of all types of floors with frequent use.
- •When it is applied in the roadway, it leaves a hard layer, very sheen and it is not sliding, which protects to the floor from scratches and the wearing away due to its use.
- With the use of this product the polished of the floor and the scratches are eliminated as a restorative of the sheen
- •It has a quick dry, it does not get it dark with the passing of the time, and it does not affect to the natural colour of the roadway.
- Avoids the incrustation of the dust, maintaining and enhancing the beauty of the roadway.
- •The effects of its constant use are cumulative, in a way that the sheen improves with each new operation.

INSTRUCTIONS OF USE

- Before its application, it is convenient to do a deep cleaning of the surface to treat, eliminating rests of dirt.
- •Once the surface is clean and completely dry, apply the wax directly as it is in its container, using for that, a clean and dry mop, spreading the product out in a thin layer.
- •In surfaces which have not been treated before, it is convenient to do three consecutive applications of the product, leaving between each application half an hour approximately.
- •Once the last application is done, leave to pass five hours approximately, and you will get a perfect finish.
- As maintenance apply 20-40 ml of product per bucket of water with mop weekly.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













INTENSO

STRONGLY PERFUMED FLOOR CLEANER



Product made by a mixture of non-ionic surfactants, degreasing and cleaners, with a pleasant odour to fresh flowers.

APLICATIONS

It is used in the cleaning of all types of facilities of catering: cafeterias, restaurants, hotels, industrial kitchens, bathrooms, etc.

Very useful in cleaning companies, maintenance companies, etc.

PROPERTIES

- Contains a mixture of surfactants which eliminate the most embedded grease and dirt.
- Contains sequestrants agents which allow the elimination of sieges in floors, terrazzo, etc.
- Contains cleaning agents which eliminate quickly the embedded dirt in floors.
- Provides floors with a big cleaning and pleasant and fresh odour to clean.
- Contains bioalcohol, which facilitates the dry, providing an unbeatable hygiene, without necessity of rinse.
- Contains a high quantity of perfum, with intense olour, especially indicated for the cleaning of all types of floors, tiles, etc.

INSTRUCTIONS OF USE

It is used diluted in the water of the mopped, in a proportion between 20-40 ml of product per bucket of 10liters of water.

It is applied with a mop, extending the product in all the surface to clan and after that leave to dry.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













MEIBEL

TEXTILE LIQUIQ DETERGENT



Textile liquid detergent, prepared specially for the washing of clothes in automatic machines. Complex and balanced mixture of anionic surfactants, enzymes, sequestrants and antireplacement.

APLICATIONS

Product with a high performance for both uses, industrial or domestic use: schools, hotels, laundries, restaurants, etc.

PROPERTIES

- Acts in a powerful and quickly way, in all types of spots in clothes, such as grease as with protein origin, including in temperate or cold water.
- •Its detergent power is comparable with solid detergent, presenting some ADVANTAGES on it:
- 1. Decreases the wearing out of the clothes.
- 2. Extends the life of the washing machine, as it avoids the incrustations.
- **3.** It is dissolved quickly in the water of the wash, so that, presents a big infiltration in the clothes.
- 4. It is easy to dose and economic in its use.
- **5.** It is applicable to any type of fiber, without producing problems for excess of foam.

INSTRUCTIONS OF USE

It is recommended to add to the washing water, following the instructions of the manufactured of the machine. As a guide mode, we can recommend:

Prewash: 125-150 cc. of detergent for each 25 liters of water

Wash with prewash: 250-300 cc. of detergent for each 25 liters of water.

Wash without prewash: 150-250 cc. of detergent for each 25 liters of water.

To get the highest effectiveness in the treatment of difficult spots, is recommendable to impregnate the spots with the detergent before to introduce the cloth in the washing machine

The recommended temperatures for washing are:

30-40 for synthetic or color clothes

40-60 for white cotton no very dirty and dark colors.

60-80 for very dirty white cotton

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.















SUATEX

TEXTILE FABRIC SOFTENER





Ideal textile fabric softener for all types of clothes including delicates clothes, by hand or by machine, providing soft antistatic properties.

APLICATIONS

Its use is recommended in: Hotels, Restaurants, Residences, School, Laundries, Hospitals, etc.

It does not contain aggressive agents in his formulation, so that it is guaranteed the softness of the washed clothes, maintaining an optimal performance.

PROPERTIES

- •Protects the clothes from the action of the aggressive detergents, avoiding the soon deterioration of the fibers, considering that it does not destroy the natural components of the wool, silk and textile mixtures.
- Provides to the washed clothes a soft and springy touch, contributing to intensify the colors.
- •Its continuous use, avoid the Static electricity in the clothes that produces the tangled fibers so that, uncomfortable balls appear in the clothes.
- •Possesses an important anti-scaling and scale-remover, haven't being affected by the hardness of water, contributing to the maintenance of the machines and providing a pleasant smell to the clothes.
- •lts dosages in water ate completely stable to any proportion.
- Possesses a very good infiltration in the clothes, acting in the same way in all the clothes.
- •Its properties continue for a long period.


INSTRUCTIONS OF USE

•It is used adding it to the water of the last rinse and always before of the last spin.

The doses to use is between 10 and 25 cc. of product for each Kg. of clothe, or what is the same, for each 5 liters of water.

A superior dosage to the recommended is not harmful, but it does not contribute too to an increase of its effects.

- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.







Ideal product for creating a very pleasant odor in all those close places exposed constantly to odors and foul airs, as it practices a permanent action.

APLICATIONS

- Domestic bathrooms, industrial public toilets, public institutional services.
- •Places where the air is foul frequently by the influence of people as in: schools, factories, hotels, restaurants, offices, etc.

PROPERTIES

- •Provides a fresh and pleasant odor which eliminates the bad odors and the sensation of foul air.
- •The permanent fragrance without necessity of renovation during a long time, depending this, of factors as: temperatures of the same, renovation of air, etc.
- •Its high concentration in active material, converts it in a profitable product, practical and economic.
- •It can be breathed by people and domestic animals.

INSTRUCTIONS OF USE

It can be used in four different ways:

1.By spray, as a traditional purifying-air freshener.

2.Applying directly on the floor or substratum, focus of bad odors, which we want to make disappear.

- **3.**Directly on the sanitarium, or behind the toilet, add a few drops or directly in the water of the mopped, making the most of this in its detergent power.
- **4.**Impregnating it in a sponge or putting it in an open recipient which allows its evaporation.

- Aerosol 400 cc in box of 12 uds.
- 1L in box of 20 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.

















AMBIBAC

ANTI-BACTERIAL AIR-FRESHENER





Air-freshener specific for the elimination of bad odors in public places or places very frequented. With its diary use, it can be got a free air of bad odors.

APLICATIONS

It is recommended the use of our airfreshener in: gyms, saunas, locker rooms, corridors and waiting-rooms in hospitals, bathrooms, public services, etc.

In general, in places where the air results foul and with risks of contamination by the influx of public in: schools, hotels, factories, restaurants, etc.

PROPERTIES

- •The studies done in our laboratories have shown that 0,3gr of product is enough for maintaining in pure, without bad odors, a place of 50 m3 of capacity. So, approximately 20 m2 of surface.
- •It can be applied with the presence of people and domestic animals, without damaging them, or annoying them.
- •The number of times to pray the place which we want to maintain in pure state will depend of factors as: quantity of people that enter and leave the place, doors or windows opened, and, in general, the air renovation.

INSTRUCTIONS OF USE

- •Spray from the center of the place, upwards and in all directions, taking into account that for maintaining the atmosphere free of bad odors, it is necessary to spray approximately 0,3 g. of product per 50 m3 of capacity of the place. So, approximately, per 20 m2 of surface.
- •It does not matter if there are people or domestic animals when the product is being used.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













AROMATIC

PURIFYING AIR-FRESHENER

Ref. H1020 - Arianne Ref. H1023 - Lavanda Ref. H1024 - Lemon Ref. H1026 - Pine Ref. H1027 - Rabanne Ref. H1028 - Sport

Ref. H1059 - Antitobbacco





Air-freshener with deodorant properties. Very efficiency in the elimination of bad odors in close and frequented places.

APLICATIONS

Eliminates the focus causatives of bad odors in rooms, meeting rooms, public places, airports, hospitals, hotels, etc.

- Clinics and hospitals.
- Cafeterias, restaurants, party rooms.
- Schools, offices, libraries, etc.
- •In general, in all close places where there is constant movement of people.

7 fragances to choose: ARIANNE - LAVANDA - PINE - RABANNE - SPORT - LEMON - ANTI-TOBBACCO

PROPERTIES

- •Flavored dissolution hydro-glyco-alcoholic perfectly equilibrated.
- Purifies the atmosphere eliminating germs.
- •It does not irritate eyes or respiratory tract, for this, it can be applied in presence of people and domestic animals.
- •Penetrates easily in places of difficult access as: cracks in walls, door's apertures, etc, getting to the focus of bad odor, stopping the processes of putrefaction.
- Perfumes pleasantly the place where it is applied.

INSTRUCTIONS OF USE

•It is applied by spray upwards and in all directions. It is also applied spraying directly on the focus of bad odors. For the following applications, the conditions of the place as: ventilation, number of people in the place, etc will be taken into account, replenishing the application all the times as necessary.

- Aerosol 400 cc in box of 12 uds.
- 5L in box of 4 uds.
- 10L in box of 2 uds.

















TRANSPARENT PERMANET AIR-FRESHENER



Ideal product for creating a very pleasant atmosphere in those close places exposed to constant odors and foul air as it provides a permanent action..

APLICATIONS

- •Bathrooms, industrial services, public toilets, etc.
- Places where the air is foul because of the existence of a lot of people there as in: schools, restaurants, hotels, offices, etc.

PROPERTIES

- Provides a fresh and pleasant odor which eliminates the bad odors and the sensation of foul air.
- The fragrance stays without necessity of renovation during a long period, depending this on factors as the influx of people in the place, temperatures of the same, and renovation of air, etc.
- Its high concentration in active material, converts it in a rentable, practical and economic product.
- It can be breathed by people and domestic animals.

INSTRUCTIONS OF USE

It can be used in four different ways:

- •By spray, as a traditional purifying-air freshener.
- Applying directly on the floor or substratum, focus of bad odors, which we want to make disappear.
- •Directly on the sanitarium, or behind the toilet, add a few drops or directly in the water of the mopped, making the most of this in its detergent power.
- •Impregnating it in a sponge or putting it in an open recipient which allows its evaporation.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













POTENTOR-ACARO

INSECTS

INSECTICIDE FOR CRAWLING



personnel specialized.

APLICATIONS

Specially is indicated for the elimination of mites, arthropods, crawling insects, etc for all types of facilities related to the food industry, stores, cold meat factories, ham driers, cold stores, quartering rooms, industrial slaughterhouses, cheese factories, fish driers, salting rooms, smoked, farms, etc.

Very useful in industrial kitchens, hotel industry, big places, etc

PROPERTIES

revimca

- Product based in a mixture of synthetic pyrethroids especially indicated for the control of crawling insects.
- •Acts paralyzing the central nervous system of the insect, producing to it a collapse and a later death.
- •It is disseminated quickly in the environment, reaching the most hidden places.
- •Allows the control of the insects, breaking the adult-larva cycle, avoiding its own proliferation and development.
- Allows the elimination of contaminations and plagues in the food industry, controlling the quantity of insects that produce important decreases in the food productions.

•Efficient with a big variety of arthropods and mites belonging to the Order Astigmata (T.Putrescentiae, T. Longior y Tyrolichus casei) and to the Order Mesostigmata (Blattisocius dentriticus). All these types of mites are the most common because of their abundant and geographic distribution, in the ham, as much in Iberian ham as mature ham.

MODE OF USE, INCLUDYING SECURITY PERIODS AND PRECISES INSTRUCTIONS FOR A CORRECT USE AND LABELLED: "To avoid risks for people and the environment follows the instructions of use". Before using the product must be read carefully the labeled.

Ventilate correctly the place before entering. Do not mix it with other chemical products. Do not use it with people around the place.

INSTRUCTIONS OF USE

The pure product is spraying in plinths and floors. It could not be applied in an aerial way or in any manipulated surface, prepare, or where food is going to be served or consumed. It could not be applied by thermo-nebulization equipment. Avoid the contact with the treated zones before.

The application of the product POTENTOR-ACARO in the food industry will be carried out with the absence of food and will be respected the minimum security period of 12 hours before using the treated places.

All the necessary and appropriate measures will be taken in order to the food, machinery or other tools which are manipulated in the places or facilities previously treated with the pro

duct, do not contain any remains from its active ingredients. Dosage: 3-5 ml/m2 (8-10ml/m3) the product is used as it is in its canning, without a previous solution. Before starting the treatment, it is recommended to take the cleaning, disinfection and the hygienic of the place where it is going to be applied to the extreme, for this, BACTERI-FUN will be used. At the beginning of the treatment, the applications will take place during the weekend, while the place is closed and avoi-

At the beginning of the treatment, the applications will take place during the weekend, while the place is closed and avoiding streams of air. One or two spraying will be done each week during the first month. As maintenance, one application each 15-30 days, are enough. Once the treatment is complete, ventilate the place before entering in it.

- 5 L. in box of 4 uds.
- 10 L. in box of 2 uds.













POTENTOR-EMULSIONABLE

MISCIBLE INSECTICIDE FOR FLYING AND CRAWLING INSECTS



APLICATIONS

Specially is indicated for the elimination of all types of flying and crawling insects in stores, industrial facilities, garages, etc.

With a big efficacy controlling plagues in residential areas, sport centers, hotels, etc.

PROPERTIES

- Product based in a mixture of synthetic pyrethroids and non ionic mixable surfactants and appropriate solvents, specially indicates for the control of flying and crawling
- •Acts by contact, dissolving the hydrophobic cuticle of the insect, paralyzing the nervous system of the insect, producing to it a collapse (the effect called Knock-down) and a
- •In its composition, contains non-ionic surfactants which allow the use of the product in a mixable way in water, making easier its manipulation.
- Efficient with flying insects (flies, mosquitos, wasps, etc) and crawling insects as cockroaches, caterpillars, ants, cochineals, silverfishes, spiders, etc.
- Allows the control of the insects, breaking the adult-larva cycle, avoiding its own proliferation an development.

Keeps the treated facilities free of insects.

MODE OF USE. INCLUDYING SECURITY PERIODS AND PRECISES INSTRUCTIONS FOR A CORRECT USE AND LABELLED: "To avoid risks for people and the environment follows the instructions of use". Before using the product must be read carefully the labeled.

Do not use it in any kind of food or kitchen's tools. It could not be applied in surfaces, areas, or any place where food would be prepared or served.

Do not apply it in playing children areas, nursery schools or

Do not use it with people or pets around the place.

Ventilate correctly the place before entering. Do not mix it with other chemical products.

INSTRUCTIONS OF USE

Spray the diluted product in water. Avoid the contact with the treated areas. The recommended security period is 24hours.

Dosage: the first time, use: 9L product/100 L water. Maintenance doses: 3L product/100 L water.

The product is applied diluting the product in water, in a mixable wav.

At the beginning of the treatment, the applications will take place during the weekend, while the place is closed and avoiding streams of air. One or two spraying will be done each week during the first month. As maintenance,

one application each 15-30 days, are enough. Once the treatment is complete, ventilate the place before entering in it.

The first time will be applied when the proliferation of plagues will be detected: flying or scrawling insects. The maintenance treatment will be applied after the product has been applied for the first time, regularly once or twice a week, taking into account the number of insects found and the process will be repeated as many times as necessarv.

- 1 L. in box of 12uds.
- 5 L. in box of 4 uds.
- 10 L. in box of 2 uds.















POTENTOR-FORTE

INSECTICIDE FOR CRAWLING INSECTS



Insecticide for crawling insects, of use in food Industry exclusively used by personnel specialized.

APLICATIONS

Specially is indicated for the control of crawling insects (cockroaches, ants, silverfishes, spiders, arthropods, etc) related to the food industry, stores, food driers, smocked stores, cold store, cold meat store, etc.

Very useful in all types of companies which apply insecticides and control the plagues (company DDD= disinfectant, disinsectisation and rat extermination) and where an appropriate insecticide is required for its use in the food industry, coffee stores, restaurants, hotels, industrial kitchens, etc.

PROPERTIES

revimca

- Product based in a mixture of synthetic pyrethroids and appropriate solvents, especially indicated for the control of crawling insects.
- Acts by contact, dissolving the hydrophobic cuticle of the insect, paralyzing the nervous system of the insect, producing to it a collapse (the effect called Knock-down) and a later death.
- •It is spread quickly getting to the most hidden places.
- •Efficient with cockroaches, caterpillars, silverfishes, spiders, etc, allowing the control of big quantities.
- Allows the control of the insects, breaking the adult-larva cycle, avoiding its own proliferation and development.
- Keeps the treated facilities free of insects.

MODE OF USE, INCLUDYING SECURITY PERIODS AND PRECISES INSTRUCTIONS FOR A CORRECT USE AND LABELLED: "To avoid risks for people and the environment follows the instructions of use". Before using the product must be read carefully the labeled.

Do not use it in any kind of food or kitchen's tools. It could not be applied in surfaces, areas, or any place where food would be prepared or served.

Do not apply it in playing children areas, nursery schools or schools. Do not use it with people or pets around the place. Ventilate correctly the place before entering. Do not mix it with other chemical products.

INSTRUCTIONS OF USE

The pure product is spraying in plinths and floors. It could not be applied in an aerial way or in any manipulated surface, prepare, or where food is going to be served or consumed. It could not be applied by thermo-nebulization equipment. Avoid the contact with the treated zones before.

The application of the product POTENTOR-FORTE in the food industry will be carried out with the absence of food and will be respected the minimum security period of 12 hours before using the treated places.

All the necessary and appropriate measures will be taken in order to the food, machinery or other tools which are manipulated in the places or facilities previously treated with the product, do not contain any remains from its active ingredients.

Dosage: 5-10 ml product/m2.

The product will be applied as it is in its can, without a previous solution, spraying directly to the insects, cracks, nests, etc.

At the beginning of the treatment, the applications will take place during the weekend, while the place is closed and avoiding streams of air. One or two spraying will be done each week during the first month. As maintenance, one application each 15-30 days, are enough. Once the treatment is complete, ventilate the place before entering in it.

- 1 L. in box of 12uds.
- 5 L. in box of 4 uds.
- 10 L. in box of 2 uds.















POTENTOR-LACA

INSECTICIDE LACQUER FOR CRAWLING INSECTS



revimca

Insecticide lacquer for crawling insects, of use in food Industry exclusively used by personnel specialized.

APLICATIONS

Specially is indicated for the control of crawling insects (cockroaches, ants, silverfishes, spiders, arthropods, etc) related to the food industry, stores, food driers, smocked stores, cold store, cold meat store, etc.

Very useful in all types of companies which apply insecticides and control the plagues (company DDD= disinfectant, disinsectisation and rat extermination) and where an appropriate insecticide is required for its use in the food industry, coffee stores, restaurants, hotels, industrial kitchens, etc.

PROPERTIES

- Made by a mixture of synthetic pyrethroids and synthetic polymers and appropriate solvents, especially indicated for the control of crawling insects.
- Acts by contact, dissolving the hydrophobic cuticle of the insect, paralyzing the nervous system of the insect, producing to it a collapse (the effect called Knock-down) and a later death.
- •Leaves a flexible and light layer that frees slowly the active ingredients of the product.
- •It is spread quickly getting to the most hidden places.
- Efficient with cockroaches, caterpillars, silverfishes, spiders, etc, allowing the control of big quantities.
- Allows the control of the insects, breaking the adult-larva cycle, avoiding its own proliferation and development.
- Keeps the treated facilities free of insects.

MODE OF USE, INCLUDYING SECURITY PERIODS AND PRECISES INSTRUCTIONS FOR A CORRECT USE AND LABELLED: "To avoid risks for people and the environment follows the instructions of use". Before using the product must be read carefully the labeled.

Do not use it in any kind of food or kitchen's tools. It could not be applied in surfaces, areas, or any place where food would be prepared or served.

Do not apply it in playing children areas, nursery schools or schools.

Do not use it with people or pets around the place.

Ventilate correctly the place before entering. Do not mix it with other chemical products.

INSTRUCTIONS OF USE

The pure product is spraying in plinths and floors. It could not be applied in an aerial way or in any manipulated surface, prepare, or where food is going to be served or consumed. It could not be applied by thermo-nebulization equipment. Avoid the contact with the treated zones before.

The application of the product POTENTOR-LACA in the food industry will be carried out with the absence of food and will be respected the minimum security period of 12 hours before using the treated places.

All the necessary and appropriate measures will be taken in order to the food, machinery or other tools which are mani-

pulated in the places or facilities previously treated with the product, do not contain any remains from its active ingredients.

Dosage: 5-10 ml product/m2.

The product will be applied as it is in its can, without a previous solution, spraying directly to the insects, cracks, nests, etc.

At the beginning of the treatment, the applications will take place during the weekend, while the place is closed and avoiding streams of air. One or two spraying will be done each week during the first month. As maintenance, one application each 15-30 days, are enough. Once the treatment is complete, ventilate the place before entering in it.

- 5 L. in box of 4 uds.
- 10 L. in box of 2 uds.













POTENTOR-FLIT INSECTICIDE FOR FLYING INSECTS



APLICATIONS

- Specially is indicated for the elimination of plagues and big amount of flying insects in all types of industrial facilities, cleaning companies, maintenance of buildings, public organizations, etc.
- Very useful in companies of DDD (disinfectant, disinsectisation and rat extermination), main of transports, sport centers, etc.

PROPERTIES

- Product based in synthetic pyrethroids especially indicated for the control of flying insects (flies, mosquitos, wasps, moths, etc.
- •Acts paralyzing the central nervous system of the insect, penetrating across the cuticle producing to it a collapse and a later death.
- •It is spread quickly getting to the most hidden places.

 Allows the control of flying insects avoiding its proliferation and development.

MODE OF USE, INCLUDYING SECURITY PERIODS AND PRECISES INSTRUCTIONS FOR A CORRECT USE AND LABELLED: "To avoid risks for people and the environment follows the instructions of use". Before using the product must be read carefully the labeled.

INSTRUCTIONS OF USE

- •Spraying of the pure product. Security period recommended: 12 hours. Ventilate the place correctly before entering.
- •Do not use it in any kind of food or kitchen's tools. It could not be applied in surfaces, areas, or any place where food would be prepared or served.
- Do not mix with other chemical products.
- •Do not use it with the presence of people or pets.

Do not apply it in playing children areas, nursery schools

or schools.

Dosage: 5-10 ml product/m2. The product will be applied as it is in its can, without a previous solution, spraying directly to the insects. Repeat the action as many times as necessary.

At the beginning of the treatment, the applications will take place during the weekend, while the place is closed and avoiding streams of air. One or two spraying will be done each week during the first month. As maintenance, one application each 15-30 days, are enough.

- 1 L. in box of 12uds.
- 5 L. in box of 4 uds.
- 10 L. in box of 2 uds.















HIDROPOOL

ANTI-ALGAE TREATMENT



APLICATIONS

We recommend its use for the treatment of the public and privates pool's waters, aquatic parks, and also tanks, etc.



Algicide-germicidal, especially created for the treatment of pool's waters, getting a clear and crystalline aspect.

PROPERTIES

- •Eliminates the turbidity of the water and bad odors due to the algae and other microorganisms.
- Maintain in good conditions bombs, pipes and the filters of the pools.
- •The algicide power of this product is determined qualitatively by the "Use Dilution Test", and quantitatively by the detachment of oxygen, getting the following results:
- •Acts as algicide with concentrations of 35 p.p.m (parts per million).
- •Acts as algiestatic with concentrations of 10-15 p.p.m
- Compatible with water of any hardness.

INSTRUCTIONS OF USE

The dosage to use will depend on the state of the pool. In general, we can recommend:

FIRST DOSAGE:

Add 0,1-0,15 Lt of product per m3 of water of the pool. The first dosage will be done when the pool is filled the first time and after storms and heavy winds which can bring spores and seaweeds from outside in big quantities.

MAINTENANCE DOSAGE:

Add 50 ml of product per m3 of water each 20-25 days to maintain the water of the pools without seaweeds.

The maintenance dosage will be done in the afternoon, without sun.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













ALGISUN

FOAM-FREE ANTI-ALGAE TREATMENT





Algicide-germicidal, especially created for the treatment of pool's waters, getting a clear and crystalline aspect.

A longer effect and a total fault of foam formation contribute as main characteristics.

APLICATIONS

We recommend its use in the treatment of the private and public pool's waters, and also in tanks etc.

•Very effective in: refrigeration towers, hot exchanger, etc.

PROPERTIES

- •It is based in a watery dilution of a cationic polymer, of algicide activity very elevated.
- It does not produce foam, or unpleasant odors.
- •Very stable in a wide range of pH.
- •It does not produce irritations of any type.

- Perfectly stable in high concentrations of chlorine.
- •lts effect is more durable than traditional algicides, and it can be dosed in a small concentration.

INSTRUCTIONS OF USE

The dosage to use will depend on the state of the pool, in general, we can recommend:

FIRST DOSAGE:

Add 0,1-0,15 Lt of product per m3 of water of the pool. The first dosage will be done when the pool is filled the first time and after storms and heavy winds which can bring spores and seaweeds from outside in big quantities.

MAINTENANCE DOSAGE:

Add 30-35 ml of product per m3 of water per 20-25 days to maintain the water of the pool without algae.

The dosage of maintenance will be done in the afternoon, without sun.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













RECUAX pH+

PH+ REGULATOR





Special product for maintaining the pH of the pool's water in optimal levels for the human body and to ensure the good functioning of the rest of the products of pool's treatment.

APLICATIONS

- Public and privates pools.
- Aquatic pools.
- Tanks, no-drinking water deposits, etc.

PROPERTIES

- •Increases the pH of the water of the pool until levels of 7,2-7,6 u.p.H
- •Avoids problems that an inappropriate pH can provoke in the water as: change of color in the water, solid deposits in the bottom of the pool, bad odors, etc.
- •Ensures the good functioning of the chloride, flocculant, algicides, etc.
- Possesses quick dissolution and big concentration.
- It is an easy product to apply.

INSTRUCTIONS OF USE

- 1. Determines the pH of the water by a TEST-KITT, for this, it will be taken a sample of same liters of water with a deep of 0,5 m, to represent the total.
- 2. Once we know the pH, add our leveler of Ph+ lgr/m3 and tenth of pH, always that the pH is inferior
- to 7,2, for this, dilute the quantity of product necessary in a bucket with water from the pool and put it in a central place to get a good homogenization.
- 3. Check that the pH is between 7,2 and 7,6.

Presentation

• 5 Kg. in box of 4 uds.





RECUAX pH-

PH- REGULATOR



revimca

Special product for maintaining the pH of the pool's water in optimal levels for the human body and to ensure the good functioning of the rest of the products of pool's treatment.

APLICATIONS

- Public and privates pools.
- Aquatic pools.
- •Tanks, no-drinking water deposits, etc

PROPERTIES

- •Increases the pH of the water of the pool until levels of 7,2-7,6 u.p.H
- •Avoids problems that an inappropriate pH can provoke in the water as: change of color in the water, solid deposits in the bottom of the pool, bad odors, etc.
- $\bullet \mbox{Ensures}$ the good functioning of the chloride, flocculant, algicides, etc.
- Possesses quick dissolution and big concentration.
- •It is an easy product to apply.

INSTRUCTIONS OF USE

- 1. Determines the pH of the water by a TEST-KITT, for this, it will be taken a sample of same liters of water with a deep of 0,5 m, to represent the total.
- 2. Once we know the pH, add our leveler of Ph+ lgr/m3 and tenth of pH, always that the pH is inferior to 7,2, for this, dilute the quantity of product necessary in a bucket with water from the pool and put it in a central place to get a good homogenization.
- 3. Check that the pH is between 7,2 and 7,6.

Presentation

• 5 Kg. in box of 4 uds.





BROCHE FLOC FLOCCULANT AGENT



BROCHE FLOC

Our flocculant agent consisted in an aqueous dissolution of aluminum salts with a moisturizing of high quality due to its low content in iron.

APLICATIONS

- Public or private pools.
- Aquatic parks.
- Tanks, etc.

PROPERTIES

- •Forms small balls with the contact of the water, keeping the non-solid micro-particles which exist in the water.
- It is a product completely stable in contact with the air.

INSTRUCTIONS OF USE

DOSAGE:

The dosage is between 20 and 50gr of product per each m3 of water to treat.

- •Distributes the product around the pool with the filter system stopped and leave to flocculate during 2 hours. After that, switch the filter system on and do a sweeping of the deep parts.
- •This operation is convenient to do it periodically each week, and even more frequently if the number of people who use it is big. In any case, it is recommended to repeat it always that the water is turbid.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













HIDROPEN PLASTIC PAINT FOR SWIMMING POOLS



Plastic paint specially designed to protect and decorate the interior of concrete and cement swimming pools, simultaneously providing waterproofing and an aesthetically perfect finish.

APLICATIONS

Recommended for covering, treating and decorating:

- Public and private swimming pools.
- Water parks.
- Pools, ponds.
- Public and private fountains, etc.

PROPERTIES

- Very resistant to sun tan oils.
- Perfectly resists the attack of chemical products used to clean swimming pools.
- Paint based on modified acrylic co-polymers in a water solution.
- Does not contain solvents that are environmentally harmful, irritating, or that cause inflammation.

- •Plugs the pores in the concrete and resists the action of fresh and salt water.
- Has very good resistance to ultraviolet radiation and to heat
- •Is easily re-painted.
- Has an optimal balance between flexibility and durability.

INSTRUCTIONS OF USE

For an optimal result, follow these steps:

- 1. The surface must be clean and dry. Remove remains of paint, lime scale, etc, with our DESCAL scale remover.
- 2. If the surface is of new concrete, apply a first coat of paint diluted in water in the proportion 1:1.
- 3. When the first coat is dry, apply a second coat of undiluted paint. If re-painting, a single, undiluted coat is sufficient.
- 4. Do not fill the pool for 2 or 3 days after treatment.

COVERAGE

The coverage will depend on the state of the surface; on average estimated as about 600 -700 g per m2 in two coats.

Presentation

• 5 Kg. in box of 4 uds.





Colors Ref. C1035- BLUE Ref. C1075- WHITE

REVIPEN

SOLVENT-BASED SWIMMING POOL PAINT



revimo

Thermoplastic acrylic paint with levelling and rheological additives, suitable pigments and solvents for fast curing.

APLICATIONS

Used for pool-wall treatment in private and public swimming pools, water parks, special pools, etc.

- Easy-to- apply, high-performance product.
- It is very useful for treatment and repair of new or old swimming pools so it is suitable for construction companies, water park operators, city halls, large communities, sports facilities, etc.

PROPERTIES

- Provides flexible, hard surfaces able to resist contraction and dilation from changes in ambient temperature.
- •Its composition waterproofs the swimming pool walls preventing leaks and water loss.
- •Quickly adheres to any type of porous surface.

- •Is compatible with acrylic paints, water and solvents.
- •Allows facilities to be put into operation in a very short

INSTRUCTIONS OF USE

Before applying product, clean the surface well to remove grease and dirt.

Repair the surface, remove imperfections and chips. Apply with a roller or brush, spreading several coats. Yield is 4 to 6 m2/Kg depending on the surface condition. Curing time varies around 15 minutes. Repainting: 1 hour. Clean tools with our special solvent.

Presentation

• 5 Kg. in box of 4 uds.





Colors: Ref. C1090 - BLUE Ref. C00124 - WHITE

BROCHE PISCICLOR CHLORINE FOR TREATMENT OF SWIMMING POOLS





Special product for the chlorine of swimming pools. Its formula is based on the trichloroisocyanuric acid, with content in active chlorine of the 90%.

APLICATIONS

- Public and private swimming pools, aquatic parks.
- Tanks, non-drinking water deposits, etc.
- Public or privates fountains without

PROPERTIES

• Possesses a high stability against the action of the ultraviolet rays which degrades and inactivates other types of chloride products for pools with less content in free chlori-

- It easy to use, it does not leave impure residues.
- Possesses a high performance.
- •Using the recommended dosage, it does not produce unpleasant odors.

INSTRUCTIONS OF USE

FIRST CHLORINATION:

•Fill the pool and check that the pH of the water is between 7,2 and 7,6, in case it is not, add our leveler of pH RECUAX.

After that and maintaining the bomb on, add directly in the skimmers, 5gr of product per m3 of water.

After a first chlorination, it is necessary to wait a security time of 48 hours before using the pool, until the concentration in active chlorine is inferior to 3 p.p.m. (parts per million).

MAINTENANCE CHLORINATION:

• Add directly to the skimmers 1-1,5gr of product per m3 of water diary.

This dosage must keep a level of active chlorine in the water of 0,6 p.p.m.

•It is convenient to do a diary control of the free chlorine. above all if there has existed anomalies as: high number of people in the pool, a very hot day, dust movements, pollen or spores caused by the wind, etc.

•The chlorination treatments must be done in the afternoon, without sun, doing the measuring one hour later.

RULES FOR THE WINTER:

- Empty the surplus water until leaving an approximate level of 10 cm under the skimmers.
- Clean and empty circuits, bombs, pipes, filters, etc.
- •Put the chlorine tablets in a floating dispenser inside the skimmer of the pool. Recommended dosage: 20-30 tablets each 3 months for 100 m3 pools.
- •Check weekly that the tablets are not completely dissolved, if it is not, renew them.
- •If it is possible, as norm of precaution, maintain the pool cover with canvas or flouting objects.

Presentation

• 5 Kg. in box of 4 uds.





Ref. H1038 (Tabletes) Ref. H1073 (Granulated)

BROCHE RAPID-FLOC

FAST-ACTING FLOCCULANT





Fast-Acting flocculant for the treatment of the water of pools which allows the put in service with less time of operation in the maintenance work. Facilitates the filtration and clarification of the water en less time that the conventional flocculants..

APLICATIONS

Appropriate for the maintenance in optimal conditions of the water in public and private pools.

- Facilitates the filtration and clarification allowing an appropriate maintenance of the water of the pool.
- Very useful in catering, summer residences, sport facilities, marine clubs, indoor swimming-pools, aquatic parks, etc.

PROPERTIES

- •Made in base to aluminum polymers with high molecular weight, provide dense which catches calcium, magnesium, iron, organic etc salts, facilitating its coagulation in the water, giving precipitates of high weight easy to filter.
- •Acts grouping thin and small layers which muddles the water, providing dense and compacts flocculus which decant quickly in the bottom of the pool.
- •Allows the clarification of the water of the pools when it is turbid, in less time than other conventional flocculants, shorting the times of maintenance and fine turning of the pool.
- Acts in a wide interval of pH, between 6 and 9 without necessity of doing later adjustments of pH.

INSTRUCTIONS OF USE

In order to avoid risk for the people and environment, follow the following instructions of use.

It is used diluting the product in water and will dose only with the system of impulsion of the pool.

DOSAGE: 5-20 ml of product/m3 of water to treat. Maintain the water in rest during 1-2 hours.

After that, do a sweeping of the bottom of the pool. The extracted water with the sweeps bottoms will be directly to the drainage without passing by the purifying plant. Once the sweeps bottoms is passed, switch the purifying on. This operation is convenient to do it periodically each week, and even more frequently if the number of bathers is big. In any case it is recommended to repeat it always than the water is turbid.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













BROCHE ALGIFLOC NON-FOAMING FLOCCU-





Product for the treatment of the pool's water which combines the flocculant action with the algaecide, without producing foam. Allows to maintain the pool clean and transparent without risks or proliferation of algae and microorganisms.

APLICATIONS

Appropriate for the maintenance in optimal conditions of the water in public and private pools.

- Facilitates the filtration and clarification allowing an appropriate maintenance of the water of the pool.
- •Very useful in catering, summer residences, sport facilities, marine clubs, indoor swimming-pools, aquatic parks,

PROPERTIES

- •Contains in its composition polymer derivates of quaternary ammonium with quick flocculants of new generation.
- •Clarify the water of the pool, eliminating the dirt which is in suspension and which muddles the water.
- Avoids the proliferation of algae and microorganisms without foam.
- •Acts grouping thin and small layers which muddies the water, providing dense and compacts floc

culus which decant quickly in the bottom of the pool.

- •Eliminates the turbidity due to the hardness of the water, presence of heavy metals, organic material, microscopic algae, etc.
- Forms small balls with the contact of the water, keeping the non-solids micro-particles which exist in the water.
- •Acts in a guick form, allowing the maintenance of the water clean and transparent.

INSTRUCTIONS OF USE

In order to avoid risk for the people and environment, follow the following instructions of use.

Before applying the product, clean the glass of the pool. In clean pools apply as first dosage 40ml of product per m3 of water.

As maintenance dosage apply 12.5ml of product per m3 of water each 7-15 days.

In pools with a visible developing of algae (green water) apply 40ml of product per m3 of water. Wait 24 hours and pass the pool cleaner to eliminate the decanted algae. The water will go directly to the wastepipe without passing through the filter system. Stir before using. Compatible with other products used for the treatment of the water of pools. NEVER ADD IT AT THE SAME TIME AS THE CHLO-RINE.

- 5L in box of 4 uds.
- 10L in box of 2 uds.













BROCHE-BROM

DISINFECTANT FOR THE WATER TREATMENT IN POOLS AND SPAS





Disinfectant for the treatment and maintenance of water in heated pools, spas, saunas, etc in optimal conditions.

APLICATIONS

- •Without chloride smell. Facilitates the hygienic treatment of the water in heated pools, spas and closed places.
- •Its use eliminates the risk of infection by microorganisms, what allows to maintain in optimal hygienic conditions the water.
- Facilitates the tuning task, and maintenance of the pool's water, spas and saunas, maintaining them in optimal hygienic conditions for the bath.
- Very useful in all types of sport facilities, hotels, big collectivities, heated pools, wellness centers, etc.

PROPERTIES

- •It is made by a bromine derivative, very stable to the temperature, pH and hardness of the water.
- Energetic oxidant which possesses an excellent disinfectant power against a wide variety of microorganisms, bacterium, algae and organic material.
- Easy use and dosage, it does not have residues or impurity.
- •The products of bromine combination in the water with organic amines which do not decrease the disinfectant efficiency of the bromine. This effect occurs with the derivates of the chloride, which produce chloramines which make to lose disinfectant efficiency and produce irritations in ocular mucous, discoloration of clothes, etc.
- •Stable in hard waters and waters with elevated pH.
- Indicates for places where there is an irritating smell to chloride.
- It does not produce ocular mucous irritation or unpleasant smells.
- Approved product in D.G.S.P and S.L.N: 12-60-45-16.

INSTRUCTIONS OF USE

- •Fill the pool and check that the pH of the water is between 7,2 and 7,6, on the contrary, add our NIVELATOR of pH.
- •Fill the dispenser of tablets of product. After that and maintaining the bomb working, apply the diluted product in water with automatic dispenser regulating the dispenser until getting a necessary level of bromine.
- DOSAGE:

Private pools: 1-3 ppm. Public pools: 3-5 ppm. Private spas: 2-4 ppm. Public spas: 4-6 ppm.

•For the measure of bromine level, use a kit of bromine and pH measure.

- •Do diary controls to maintain the necessary bromine level.
- •Check weekly the level of tablets of the dispenser and replace in function of consumption.

Consumption of product: private pools: 0,18 kg/10m3. Public pools: 0,3kg/10m3. Private spas: 6-10g/day/1.1m3. Public spas: 8-12g/day/1.1m3

Presentation

• 5 Kg. in box of 4 uds.



